



12 VDC Hydraulic Power Packs



9-1478

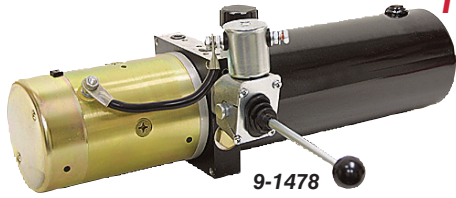

9-1480

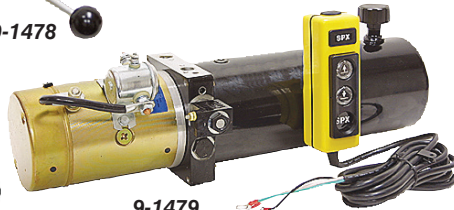

9-1479



9-1790



• Brand new SPX STONE. Hydraulic power packs for operating hydraulic cylinders. Steel reservoir tank with inlet strainer, magnet and filtered filler/breather. Built in check valve and adjustable relief valve. See chart for details about control valves, tank size and pressure ratings.

SPECIFICATIONS (all models)

- Flow rate 1.3 GPM at max PSI
- 12 VDC motor
- Needle bearings
- Intermittent duty

ITEM	Valve Type	Ports	Relief Valve		Tank Size		Shpg.	Price
			Factory Set	Cap.	Useable	Size		
9-1478	Single Acting Lever Operated	3/8" NPT	2500 PSI	3 qt.	2.3 qt.	21" x 9" x 7"	38 lbs.	\$397.45
9-1479	Single Acting 12 Volt DC w/handheld remote	SAE 6	2500 PSI	3 qt.	2.3 qt.	21" x 8" x 6"	39 lbs.	\$424.65
9-1790	Single Acting 12 Volt DC w/handheld remote	SAE 6	1100 PSI	2.5 gal.	1.6 gal.	26" x 8" x 8 3/8"	40 lbs.	\$450.20
9-7412	Single Acting 12 Volt DC w/handheld remote	SAE 6	2500 PSI	2.5 gal.	1.6 gal.	25" x 8 7/16" x 8"	40 lbs.	\$453.15
9-1480	Double Acting 12 Volt DC (does not include remote)	SAE 6	2500 PSI	3 qt.	2.3 qt.	21" x 8" x 7"	40 lbs.	\$445.15
9-7413	Double Acting 12 Volt DC (does not include remote)	SAE 6	2500 PSI	2.5 gal.	1.6 gal.	25" x 8" x 7"	41 lbs.	\$459.70
9-7411	None (use with external valve)	SAE 6	2500 PSI	2.5 gal.	1.6 gal.	25" x 7" x 8"	40 lbs.	\$402.60

2 HP 115/230 VAC Hydraulic Power Packs

• Brand new, SPX hydraulic power packs. All models include motor, gear pump and steel reservoir tank with filtered filler/breather. Horizontal mount. Select from a variety of valve options in chart below.

SPECIFICATIONS (all models)

- 2 HP TEFC motor
- 3450 RPM
- Continuous duty
- 115/230 VAC, 1 Ph.
- 22/11 Amps
- Port(s) SAE 6



ITEM	Pressure/Flow	Relief Valve		Valve Type	Tank Size		Shpg.	Price
		Factory Set	Cap.		Useable	Size		
9-7136	2.5 GPM @ 1000 PSI	1300 PSI	4 gal.	3.03 gal.	39" x 9" x 9 3/8"	55 lbs.	\$528.60	
9-7137	1.3 GPM @ 2000 PSI	2500 PSI	2.5 gal.	1.6 gal.	30" x 9" x 9 3/8"	52 lbs.	\$571.75	
9-7138	1.3 GPM @ 2000 PSI	2500 PSI	2.5 gal.	1.6 gal.	30" x 9" x 9 3/8"	53 lbs.	\$672.85	
9-7135	1.3 GPM @ 2000 PSI	2500 PSI	2.5 gal.	1.6 gal.	30" x 9" x 9 3/8"	51 lbs.	\$529.25	

10 ft. Hand Held Remote Controls for DC Powerpacks



ITEM 9-1441-S \$35.25  
• For single acting, 3 wire style 9-1479, 9-1790, 9-7412  
Shpg. 4 lbs.

ITEM 9-1441-D \$55.20  
• For double acting, 3 wire style 9-1480, 9-7413  
Shpg. 4 lbs.

ITEM 9-8845 \$44.20  
• Brand new two pushbutton (4 wire) hand held control made for use with double acting hydraulic power packs with two coil solenoid valve. Magnets on back for mounting to steel surfaces. 10 foot power cord. Shpg. 4 lbs.

2 HP 230 VAC Hyd. Powerpack




ITEM 9-7139 \$520.05  
• Brand new SPX hydraulic powerpack ideal for use in automobile hoists, lifts and other applications. Cartridge style check valve for load-holding. Momentary "ON" pushbutton switch for raising with a manual lever for lowering. Vertical mount.

SPECIFICATIONS

- 2 HP TENV motor
- 208-230 VAC, 1 Ph.
- Amps 15-18
- Int. duty
- 2.25 GPM at 2000 PSI max. output
- 2300 PSI max.
- 2300 PSI fixed relief setting
- 4 gallon plastic reservoir (3 gallon usable)
- Port SAE 6
- Mount vertical
- Size 10 1/2" x 7" x 31 1/2"
- Shpg. 60 lbs.

12 VDC Snow Plow Powerpack

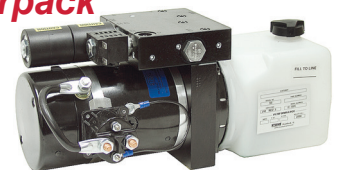

ITEM 9-8411 \$720.75  
• Brand new, SPX Model DC-80SPC. Power pack with built-in 12 volt DC solenoid valves for operating snow plows. Provides power up, hold and gravity down for single acting cylinder blade lift plus left and right control for two single acting cylinders or one double acting cylinder for blade angle. Horizontal mount.

SPECIFICATIONS

- Voltage 12 VDC
- Amperage 300 amps
- Duty intermittent
- Flow 1.7 GPM at 1750 PSI
- Pressure 3500 PSI max.
- Main relief valve adj. set at 2000 PSI
- Cross-over relief valve 1500 PSI
- Reservoir 1.5 qt. useable
- Ports cylinder 1/4" NPT
- Mnt. 2 bolt base 3 1/4" c/c
- Orientation horizontal
- Size 14 3/4" x 8 1/8" x 7 1/4"
- Shpg. 36 lbs.