

Single Acting Telescoping Cylinders

5 1/4" x 166 1/8" x 2 3/4"



ITEM 9-9394

\$1049.95

• Port in end of rod.

SPECIFICATIONS

- Unused, old inventory
- Single acting, telescoping
- Main cylinder bore x total stroke 5 1/4" x 166 1/8"
- Number of stages 3
- Pressure 2000 PSI max.
- Rod dia. 2 3/4"
- Port SAE 12
- Retracted lgth. 11 1/4"
- Rod tang w/ swivel eye 2" Pin hole 1 1/2"
- Male trunnion trunnion pin width outside 12 3/8", inside 9" pin ctr. to rod pin ctr. 11 1/4" pin ctr. to base end 61 1/2" trunnion pin 1 3/4"
- Shpg. 370 lbs.

Truck freight only.

6 1/4" x 72 7/8" x 2 3/4"



ITEM 9-10219

\$899.99

SPECIFICATIONS

- Unused, old inventory
- Single acting, telescoping
- Main cylinder bore x total stroke 6 1/4" x 72 7/8"
- Number of stages 4
- Pressure 2000 PSI max.
- Rod dia. 2 3/4"
- Port SAE 12
- Retracted lgth. 32 1/2"
- Rod thru-hole 2 3/4" wide
- Base crosstube 7 1/4" w.
- Pin holes rod 1 1/16", base 3 1/2"
- Shpg. 230 lbs.

Truck freight only.

6 1/4" x 63 3/4" x 3 3/4"



ITEM 9-8220

\$899.99

SPECIFICATIONS

- New
- Single acting, telescoping
- Main cylinder bore x total stroke 6 1/4" x 63 3/4"
- Number of stages 3
- Pressure 2000 PSI max.
- Rod dia. 3 3/4"
- Port SAE 12 w/ restrictor
- Retracted lgth. 35 1/4"
- Rod tang 2" thick
- Base crosstube 7 1/4" w.
- Pin holes rod 2", base 3.61"
- Shpg. 260 lbs.

Truck freight only.

9.75" x 66"



ITEM 9-8846

\$2495.95

SPECIFICATIONS

- New
- Single acting, telescoping
- Tang Ends
- Rod End Pin Center to Tang End 2 1/4"
- Rod End Pin Hole 2 1/2"
- Base End Pin Center to Tang End 2 1/2"
- Base End Pin Hole 3"
- Max Thickness 3"
- Main Cyl Bore x Total Stroke 9 3/4" x 66"
- Number of Stages 3
- Pressure 2500 PSI max.
- Rod Dia. 6", Hollow
- Rod Thickness 1/4"
- Port SAE 24
- Retracted Length 41 1/4"
- Shpg. 575 lbs.

5 1/2" x 42 1/4" x 3 3/4"



ITEM 9-9056

\$509.95

SPECIFICATIONS

- Unused old inventory
- Single acting, telescoping
- Main cylinder bore x total stroke 5 1/2" x 42 1/4"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 3 3/4"
- Port SAE 8
- Retracted lgth. 8 1/2"
- Rod crosstube 9 1/4" w. Pin hole 1 1/2"
- Female trunnion trunnion pin width outside 9 1/4", inside 6 1/4" pin ctr. to rod pin ctr. 8 1/2" pin ctr. to base end 21 3/4" trunnion 1 1/2" dia.
- Shpg. 260 lbs.

Truck freight only.

8 1/2" x 46 7/8" x 6 3/4"



ITEM 9-9621

\$999.99

SPECIFICATIONS

- Unused old inventory
- Single acting, telescoping
- Main cylinder bore x total stroke 8 1/2" x 46 7/8"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 6 3/4"
- Ports 1" NPT
- Retracted lgth. 34 1/4"
- Tang ends 2" thick
- Pin holes 1 1/2"
- Shpg. 330 lbs.

Truck freight only.

4" x 20" x 1.5"



ITEM 9-9667-A

\$399.95

SPECIFICATIONS

- Single Acting
- Main Cyl Bore x Total Stroke 4" x 20"
- Number of Stages 3
- Pressure 2500 PSI
- Rod Dia. 1.5"
- Ports SAE 8
- Overall Length 12"
- Flat Ends
- Shpg. 40 lbs.

4 3/4" x 63" x 2 3/4"



ITEM 9-9583

\$878.95

SPECIFICATIONS

- New
- Double acting, telescoping
- Main cylinder bore x total stroke 4 3/4" x 63"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 2 3/4"
- Ports SAE 14
- Retracted lgth. 68"
- Crosstube ends rod 6 3/16" w., base 5" w.
- Pin holes 2"
- Shpg. 360 lbs.

Truck freight only.

5 1/4" Bore Cylinders



5 1/4" x 56 1/4" x 3 3/4"

ITEM 9-8225

\$599.99

SPECIFICATIONS

- New
- Double acting, telescoping
- Main cylinder bore x total stroke 5 1/4" x 56 1/4"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 3 3/4"
- Extend port SAE 12
- Retracted lgth. 65 1/2"
- Tang ends with swivel eye 1.377" (35mm) thick
- Pin holes rod 1.969" (50mm), base 1.972" (50mm)
- Shpg. 320 lbs.

Truck freight only.

5 1/4" x 72.25"

ITEM 9-8223

\$599.99

SPECIFICATIONS

- Unused, old inventory.
- Double Acting, Telescoping
- Main Cyl Bore x Total Stroke 5-1/4" x 72-1/4"
- Number of Stages 2
- Pressure 2000 PSI max.
- Rod Dia. 3-3/4"
- Extend Port SAE 16
- Retracted Length 62-1/4"
- Shpg. 320 lbs.

Truck freight only.

5 1/4" x 73 3/4" x 3 3/4"

ITEM 9-8224

\$799.99

SPECIFICATIONS

- New
- Double acting, telescoping
- Main cylinder bore x total stroke 5 1/4" x 73 3/4"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 3 3/4"
- Extend port SAE 16
- Retracted lgth. 65 1/4"
- Tang ends with swivel eye 1 3/8" thick
- Pin holes 50mm
- Shpg. 305 lbs.

Truck freight only.

5 1/2" x 54 1/4" x 4"



ITEM 9-7525

\$1395.00

SPECIFICATIONS

- New
- Double acting, telescoping
- Main cylinder bore x total stroke 5 1/2" x 54 1/4"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 4"
- Ports SAE 16
- Retracted lgth. 58"
- Rod tang with swivel eye 2 1/2" thick
- Base crosstube 8 1/4" w.
- Pin holes 2"
- Shpg. 285 lbs.

Truck freight only.

5 1/2" x 78 3/8" x 4"



ITEM 9-7533

\$1395.00

SPECIFICATIONS

- New
- Double acting, telescoping
- Main cylinder bore x total stroke 5 1/2" x 78 3/8"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 4"
- Ports SAE 16
- Retracted lgth. 58 1/4"
- Rod tang with swivel eye 2 1/2" thick
- Base crosstube 8 1/4" w.
- Pin holes 2"
- Shpg. 285 lbs.

Truck freight only.

Bore - Inside diameter of cylinder


Stroke - How far a cylinder extends out

R-length - Distance in inches between pin centers when cylinder is retracted

Rod Diameter - Diameter of cylinder rod

Single Acting - Cylinder is powered one way

Cylinders Definitions

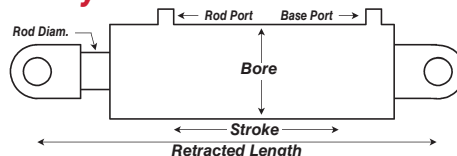

Double Acting - Cylinder is powered both ways (two way)

Crosstube End - Round tube welded perpendicular to cylinder

Single Eye End - For mounting between two mounting ears.

Clevis End - Two mounting ears