

### 3 Bolt Offset Flange Bearing



ITEM 1-204-12-FB3-S

**\$4.95**

New 200 series 3 bolt offset flange bearing. Cast iron construction with self-aligning ball bearing insert and grease zerk. Two set screw on the inner race to lock shaft.

- SPECIFICATIONS**
- Bore  $\frac{3}{4}$ "
  - Bore Thru-Length 1.221"
  - Bearing # UC204-12
  - Housing # FB204
  - Mount Bolt Centers 1.500"
  - x 0.874" (horizontal x vertical)
  - Bolt Size  $\frac{3}{8}$ "
  - Size 2. 2.5" wide x 4.25" high
  - Shpg. 2 lbs.

### 2.5" Spherical Bearing



ITEM 1-3729

**\$29.95**

• New, RBC Model BH4044LSS high misalignment heavy duty spherical bearing. Use for hydraulic cylinders with proper size end fittings. Includes 2 snap rings to lock in place.

- SPECIFICATIONS**
- Bore 2.5"
  - Inner ring width 2.545"
  - Spherical dia. 3.95"
  - Outer ring width 2.062"
  - Load limits
  - Static radial 285,000 (lbf)
  - Static thrust 62,600 (lbf)
  - Dynamic radial 71,200 (lbf)
  - Shpg. 7 lbs.

### Tapped Base Pillow Block Bearing



ITEM 1-204-12-PA-S

**\$5.95**

New 200 series pillow block bearing. Cast iron construction with self-aligning ball bearing insert and grease zerk. Two set screws on the inner race to lock shaft.

- SPECIFICATIONS**
- Bore  $\frac{3}{4}$ "
  - Bore Thru-Length 1.2"
  - Center-Line Height 1.2"
  - Bearing # UCP204-12
  - Housing # PA205
  - Mount 2" bolt center
  - Bolt Size  $\frac{3}{8}$ -16 drilled/tapped
  - Overall Height 2.75"
  - Shpg. 2 lbs.

### Roller Chain Loop



ITEM 1-4345

**\$4.95**

• New, ANSI standard riveted roller chain. Continuous loop of roller chain.

- SPECIFICATIONS**
- Pitch 25
  - Length 48" (96 Links)
  - Shpg. 1 lb.


### 1 Strand Roller Chain Lengths



• New, ANSI standard riveted roller chain in various lengths. More sizes online!

ITEM	Pitch	Lgth.	Type	Shpg.	Price
1-4830	35	21 1/4"	R	3/4 lb.	\$ 1.85
1-4829	35	27"	R	3/4 lb.	\$ 1.99
1-2549	41	27"	R	1 lbs.	\$ 3.95
1-1163-41	41	10 ft.	R	5 lbs.	\$15.99
1-1873-A	65 (43)	33"	R	1 lbs.	\$ 1.95
1-1873-B	65 (43)	71"	R	2 lbs.	\$ 4.95
1-1941	65 (43)	246"	R	6 lbs.	\$17.95

### 4 Speed Transaxle

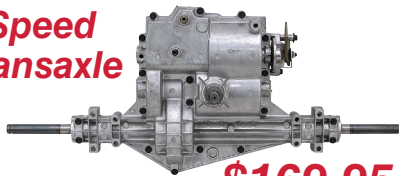

ITEM 13-1598

**\$169.95**

• New PEERLESS model MST-204-583A transaxle. Sealed case, pre-lubricated. Axle has snap ring grooves. External disc brake. This is a tractor style rider transaxle. The input shaft must be in front of the axles.

**SPECIFICATIONS**

- Speeds 4 forward, neutral and reverse
- Input Shaft  $\frac{5}{8}$ " dia. x 1" with key and snap ring groove
- Input Rotation CW
- Max Input Speed 2000 RPM
- Axle  $\frac{3}{4}$ " dia. x 29" ,  $\frac{3}{16}$ " keyway
- Mount Pattern Inner mtg. centers: 1 3/4" x 13"
- Outer mtg. centers: 2 1/2" x 16 1/4"
- Shpg 35 lbs.

### 30T 5/8 Bore 40P Sprocket

ITEM 1-5342-30

**\$3.95**

New, steel sprocket.

**SPECIFICATIONS**

- Pitch 40
- Teeth 30
- Bore  $\frac{5}{8}$ " unfinished
- Hubless
- O.D. 5.06"
- Shpg 1.5 lbs.

### 30T 1.875 Bore 40P Sprocket

ITEM 1-5342-30-A

**\$3.95**

### Special Purchase Sprockets

• New, finished bore ANSI standard sprockets.

All have set screw except 1-2742-9-NS & 1-2413-10-AAA.

1-2413-10-AAA has drive pin holes

Item #	Pitch	Teeth	Dia.	Bore	Shpg.	Price
1-2742-9-A-NS	25	9	0.84"	1/4"	1/8 lb.	\$1.49
1-2413-10-AAA	35	10	1.38"	7/16"	1/8 lb.	\$1.99
1-2413-10-AA-S	35	10	1.38"	3/8"	1/8 lb.	\$1.99
1-2413-10-A-S	35	10	1.38"	1/2"	1/8 lb.	\$1.99
1-2413-11-AAA-S	35	11	1.50"	5/16"	1/4 lb.	\$2.45
11-2413-11-A-S	35	11	1.50"	1/2"	1/4 lb.	\$2.45
1-2413-22-A-S	35	22	2.83"	1/2"	1 lb.	\$3.99

### Hydrostatic Transaxle Set



ITEM 13-1596

**\$599.95**

New, Hydro-gear ZT-2200 EZT series transaxle. Includes on each of models ZC-DPBB-2M5A-2WPX (left) and ZC-APBB-2M5A-2WPX (right) zero-turn style hydrostatic transaxles. Integrated 10cc variable displacement axial pump and a 10cc fixed displacement drive motor. Features include a die cast aluminum housing, belt-drive input pulley with fan, single control lever per unit for forward-reverse and speed control, disengagement lever to allow freewheeling, four bolt hub for direct mounting of wheel and cog type parking brake.

**SPECIFICATIONS**

- Input Speed 1800-3000 RPM
- Overall Reduction 19.2:1
- Ground Speed 7 MPH max.
- Engine Size 18-22 HP
- Output Torque Up to 215 ft.-lbs.
- Max. Vehicle Wt 900 lbs.
- Input Rotation CW
- Input 4 1/2" dia. pulley for 1/2" belt
- Axle Length
- 2" housing to face of hub
- Output 4 bolt wheel hub on 4" B.C.
- Mount 6 hole
- Lubrication 20W-50 motor oil, 1.75 qt.
- Size 14 3/4" x 14 1/4" x 10 1/4"
- Shpg. 90 lbs.

### Worm Drive Hose Clamps

- Brand new, worm drive hose clamps. Stainless steel band with zinc plated screw. 5/16" slotted hex head screw. Sold individually or in boxes of 10 clamps.

#### 5/16" Wide Mini Hose Clamps

SAE Size	Clamp Range	Box of 10 clamps		
		ITEM	Shpg.	Price
4	1/4" to 5/8"	1-5041-4	1/4 lb.	\$4.20
6	5/16" to 7/8"	1-5041-6	1/4 lb.	\$4.00



#### 1/2" Wide Standard Hose Clamps

SAE Size	Clamp Range	Individually			Box of 10 clamps		
		ITEM	Shpg.	Price	ITEM	Shpg.	Price
6	3/8" to 7/8"	1-5039-6	1/10 lb.	\$ 0.55	1-5040-6	1 lb.	\$5.25
8	7/16" to 1"	1-5039-8	1/10 lb.	\$ 0.55	1-5040-8	1 lb.	\$5.00
10	1/2" to 1 1/16"	1-5039-10	1/10 lb.	\$ 0.55	1-5040-10	1 lb.	\$5.00
12	1/2" to 1 1/4"	1-5039-12	1/8 lb.	\$ 0.55	1-5040-12	1 lb.	\$5.00
16	13/16" to 1 1/2"	1-5039-16	1/8 lb.	\$ 0.55	1-5040-16	1 1/2 lbs.	\$5.00
20	13/16" to 1 3/4"	1-5039-20	1/8 lb.	\$ 0.65	1-5040-20	1 1/2 lbs.	\$6.00
24	1" to 2"	1-5039-24	1/8 lb.	\$ 0.65	1-5040-24	1 1/2 lbs.	\$6.00
28	1 5/16" to 2 1/4"	1-5039-28	1/8 lb.	\$ 0.65	1-5040-28	1 1/2 lbs.	\$6.00
32	1 9/16" to 2 1/2"	1-5039-32	1/8 lb.	\$ 0.75	1-5040-32	1 1/2 lbs.	\$7.00
36	1 13/16" to 2 3/4"	1-5039-36	1/8 lb.	\$ 0.75	1-5040-36	1 1/2 lbs.	\$7.00