

Leeson Single Phase Face & Base Mount TEFC Motors



184 TC Frame

• Brand new, LEESON general purpose electric motor. Face mount allows for direct coupling to pumps and gearboxes. Capacitor start and run. Steel housing. Manual reset thermal overload protection.

SPECIFICATIONS

- Rotation reversible
- TEFC
- Phase 1



213TC & 215TC Frame


1800 RPM

ITEM	Catalog Number	HP	Voltage	Amps	Frame	Shaft Dia.	Service Factor	Overload Prot.	Size	Shpg.	Price
10-2886	131631.00	3	115/208-230	33.6/16.8	184TC	1 1/8"	1.0	Manual	13 15/16" x 11" x 11 5/16"	84 lbs.	\$1147.80
10-2888	131633.00	5	230	23	184TC	1 1/8"	1.0	Manual	13 15/16" x 11" x 11 5/16"	86 lbs.	\$991.40
10-2890	140807.00	7 1/2	230	33.6	215TC	1 3/8"	1.15	None	17 1/8" x 13 1/4" x 11 3/4"	171 lbs.	\$1382.70
10-2892	140678.00	10	230	40	215TC	1 3/8"	1.15	None	17 5/8" x 13 1/4" x 11 3/4"	159 lbs.	\$1290.45

3600 RPM

ITEM	Catalog Number	HP	Voltage	Amps	Frame	Shaft Dia.	Service Factor	Overload Prot.	Size	Shpg.	Price
10-2885	121060.00	3	230	13	145TC	7/8"	1.0	Manual	10 7/8" x 8 7/8" x 8 5/8"	51 lbs.	\$596.35
10-2887	131632.00	5	230	19.8	184TC	1 1/8"	1.15	Manual	13 15/16" x 11" x 11 5/16"	103 lbs.	\$951.60
10-2889	140694.00	7 1/2	208-230	36-32	213TC	1 3/8"	1.0	None	15 5/16" x 13 1/8" x 11 1/16"	150 lbs.	\$1116.65
10-2891	140695.00	10	208-230	44-41.5	215TC	1 3/8"	1.0	None	18 3/4" x 13 1/8" x 11 1/16"	152 lbs.	\$1332.60

10 HP, 230 VAC Farm Duty Motor

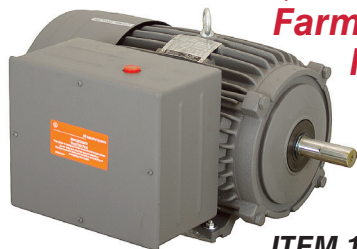

ITEM 10-2649 \$749.99

• New, GE Model 5KC215BC219U high torque farm duty electric motor. External manual reset overload protection.

SPECIFICATIONS

- Power 10 HP
- Voltage 230 VAC
- Amperage 48 amps
- Speed 1710 RPM
- Rotation reversible
- Phase 1 Phase
- Service factor 1.0
- Bearings ball
- Enclosure TEFC
- Duty continuous
- Frame 215TZ
- Mount four bolt base on 8 1/2" x 7" centers
- Shaft 1 1/8" diam x 3 1/2" w/ 1/4" keyway
- Size 18 3/4" x 16 1/2" x 12 1/2"
- Shpg. 200 lbs.

Truck freight only.

1 3/4 HP 3490 RPM Centrifugal Pump Motor



ITEM 10-2669 \$99.99

• New, WEG model# .7536ES1BJPR56C capacitor-start, induction-run motor. Steel housing, stainless steel shaft. Intended for use with centrifugal pump. Thermal overload protection with automatic reset.

SPECIFICATIONS

- Power 3/4 HP (0.55 kW)
- Voltage 115/208-230 VAC, 60 Hz
- Amperage 10.4/5.0-5.2 Amps
- Speed 3490 RPM
- Rotation Reversible
- Phase 1
- Service Factor 1.15/1.0 @ 208 VAC
- Enclosure TEFC
- Duty Continuous
- Frame B56C
- Mount Four 3/8"-16 threaded holes in motor face on 5 7/8" B.C., 4 1/2" pilot
- Shaft 5/8" dia. x 2 3/16" overall length w/ 3/16" wide x 1 1/16" long keyway
- Size 9 1/4" L x 9 1/2" W x 8 1/4" T
- Shpg. 29 lbs.

1 1/2 HP, 115/230 VAC Grain Stirring Motor



ITEM 10-2769 \$389.75

• Brand new, LEESON Model P6K17-FB18H grain stirring motor. High torque design. Designed for use in grain bins. Vertical shaft up with drain hole. Capacitor start and run motor. Steel construction. Manual overload protection.

SPECIFICATIONS

- Catalog # 111330.00
- Power 1 1/2 HP
- Voltage 115/208-230 AC
- Amperage 17.2/8.8-8.6
- Speed 1800 RPM
- Rotation reversible
- Phase 1
- Service factor 1.0
- Bearings ball
- Enclosure TEFC
- Duty continuous
- Frame 56HZ
- Base mount 6 hole mount on 4 7/8" x 3" to 5" centers
- Shaft 7/8" dia. x 1.31" w/ 3/16" keyway
- Size 11" x 8.89" x 8.56"
- Shpg. 45 lbs.

1/2 HP 3450 RPM Motor



ITEM 10-3080 \$69.95

• New, DAYTON model# 3N590BD three-phase, industrial motor. Rigid welded base.

SPECIFICATIONS

- Power 1/2 HP / 1/3 HP
- Voltage 208-230/460 VAC, 60 Hz, 190/380 VAC, 50 Hz
- Amperage 1.9-1.8/0.60 Amps, 1.6/0.8 Amps
- Speed 3450 RPM, 2850 RPM
- Rotation Reversible
- Phase 3
- Service Factor 1.25
- Bearings Ball
- Enclosure ODP
- Duty Continuous
- Frame 56
- Base Mount Four 1 1/4" x 5/16" slots on 4 7/8" x 3" centers
- Shaft 5/8" dia. x 1 15/16" long w/ 3/16" wide keyway
- Size 10" L x 6 1/2" W x 7" T
- Shpg. 20 lbs.

2 HP 1740 RPM 115/230 Volt AC Washdown Motor



ITEM 10-3118 \$379.95

• New, MARTHON model 182TCWW7026 epoxy coated washdown electric motor. Capacitor start and run. Steel housing. No thermal overload protection. Made in the USA.

SPECIFICATIONS

- Catalog Number N1684
- Power 2 HP
- Voltage 115/208-230 AC
- Amperage 21/11-10.5 Amps
- Speed 1740 RPM
- Rotation Reversible
- Phase 1
- Service Factor 1.15
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 182T
- Base Mount: Four 3/8"-16 tapped holes on 5 7/8" diameter bolt circle
- Shaft 5/8" diam. x 1 7/8" w/ 3/16" keyway
- Size 10.5" x 10" x 11"
- Shpg. 70 lbs.

1 HP 1800 RPM 115/230 Volt AC Washdown Motor



ITEM 10-3117 \$299.95

• New, MARATHON model D56C17W5388 washdown motor. Designed to handle high-pressure wash-downs. White epoxy paint coat. Stainless steel fan and junction box covers. No thermal overload protection. Steel construction. Solid state encapsulated starting switch. Made in the USA.

SPECIFICATIONS

- Catalog No. N682
- Power 1 HP
- Voltage 115/208-230 AC
- Amperage 12.8/6.4 Amps
- Speed 1800 RPM
- Rotation Reversible
- Phase 1
- Service Factor 1.15
- Bearings Ball
- Enclosure TEFC
- Duty Continuous
- Frame 56
- Base Mount Four 5/16" wide slots on 4 7/8" x 3" centers
- Shaft 5/8" dia. x 1 7/8" w/ 3/16" keyway
- Size 12 3/16" x 9 1/8" x 9"
- Shpg. 36 lbs.