

**12 VDC
2550 RPM
Motor**



**ITEM 10-3064
\$94.95**

• Brand new, Buyer's Products model# 1306007 snow plow motor. Replacement motor for many hydraulic power packs.

SPECIFICATIONS

- Voltage 12 VDC
- Amperage 200 Amps, Max.
- Speed 2550 RPM
- Rotation Clockwise
- Enclosure TENV
- Duty Intermittent

- Face Mount Two thru-holes on 3⁹/₁₆" centers for 1/4" O.D. bolts
- Shaft 5/8" O.D. shaft w/ 1/4" wide female tang
- Size 6³/₄" L x 4¹/₂" housing dia.
- Shpg. 16 lbs.



**0.4 HP,
24 VDC
Motor**

\$119.95

ITEM 10-3016

• New, AMETEK-PITTMAN precision permanent magnet DC motor. Model 3334-M5156. Could also be used as a direct current generator.

SPECIFICATIONS

- Power 0.4
- Voltage 24 DC
- Amperage 15 amps
- Speed 1800 RPM
- Rotation reversible
- Bearings ball
- Enclosure TENV

- Duty continuous
- Torque 225 oz. in.
- Mount 4 holes on face 2³/₄" square
- Shaft 1/2" dia. x 1¹/₈" w/1/8" keyway
- Size 3¹/₄" x 3¹/₄" x 8"
- Shpg. 12 lbs.



**12 VDC
Motor**

**ITEM 10-2893
\$29.95**

• New, permanent magnet motor. Built to drive agricultural spray pumps. 5 mounting bosses on front cover for attaching pump. Could also be used as DC generator. Rubber isolators for holes in mounting base.

SPECIFICATIONS

- Power 1/4 HP
- Voltage 12 DC
- Speed/Amps
- 2600 RPM, 2.2 amps no load
- 2300 RPM, 25 amps, 7 in.lbs. torque
- Rotation reversible

- Bearings ball
- Enclosure TENV
- Duty continuous
- Frame rigid welded base
- Mount 4¹/₈" x 2¹/₂"
- Shaft 5/16" dia. x 1¹/₁₆" w/flat
- Size 4¹/₄" dia. x 4¹/₂"
- Shpg. 8 lbs.

**1/4 HP 90
VDC
Motor**

**ITEM 10-3113
\$139.95**

• New, DAYTON model 2M167D permanent magnet motor. Removable steel base. Class H insulation.

SPECIFICATIONS

- Power 1/4 HP
- Voltage 90 DC
- Amperage 3 Amps
- Speed 1725 RPM
- Torque 9 in-lbs
- Rotation Reversible
- Service Factor 1.0
- Bearings Ball

- Enclosure TENV
- Duty Continuous
- Frame 56C
- Mount Face & base
- Shaft 5/8" x 1⁷/₈", 3/16" keyway
- Size 8⁹/₁₆" x 6¹/₂" x 7¹/₂"
- Shpg. 19 lbs.




1800 RPM Motors

• Brand new, WORLDWIDE ELECTRIC permanent magnet motors. Bolt on/off steel base. Class F insulation. 20:1 speed range at constant torque.



SPECIFICATIONS FOR ALL

- Voltage 12 DC
- Speed 1800 RPM
- Rotation reversible
- Service factor 1.0
- Bearings ball
- Duty continuous
- Frame 56C
- Mount face & base
- Shaft 5/8" x 1⁷/₈" w/3/16" keyway

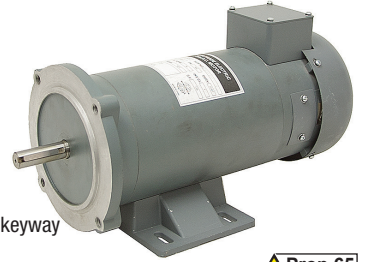

Prop 65

12 VDC

ITEM	HP	Amps	Torque	Enclosure	Size	Shpg.	Price
10-2571	1/3	26.4	0.97 lb.ft.	TENV	8.1" x 5.87" x 7.63"	20 lbs.	\$218.85
10-2572	1/2	40	1.46 lb.ft.	TENV	10" x 5.87" x 7.63"	23 lbs.	\$258.25
10-2573	3/4	61.2	2.19 lb.ft.	TEFC	11.4" x 5.87" x 7.63"	30 lbs.	\$303.15
10-2574	1	82.2	2.92 lb.ft.	TEFC	12.2" x 5.87" x 7.63"	35 lbs.	\$337.50

90 VDC

See page 160 for compatible speed controllers.

Prop 65

ITEM	HP	Amps	Torque	Enclosure	Size	Shpg.	Price
10-2575	1/3	3.5	0.97 lb.ft.	TENV	8.1" x 5.87" x 7.63"	21 lbs.	\$190.00
10-2576	1/2	5.2	1.46 lb.ft.	TENV	10" x 5.87" x 7.63"	23 lbs.	\$258.50
10-2577	3/4	7.8	2.19 lb.ft.	TEFC	11.4" x 5.87" x 7.63"	30 lbs.	\$293.70
10-2578	1	10.4	2.92 lb.ft.	TEFC	12.2" x 5.87" x 7.63"	33 lbs.	\$308.90
10-2579	1 1/2	15.4	4.38 lb.ft.	TEFC	14.38" x 5.87" x 7.63"	40 lbs.	\$333.80



Winch Motor

**ITEM 10-1839
\$89.95**

• Brand new. Built as replacement motor for commercial winches. Series wound.

SPECIFICATIONS

- Voltage 12 DC
- Amps 50 no load
- RPM 8000
- Rotation reversible
- Duty intermittent
- Frame 3" pilot ring

- Mount 4 tapped holes 4" BC
- Shaft 3/4" diam. x 1³/₄"
- w/keyway
- Size 4" x 4" x 7³/₄"
- Shpg. 22 lbs.

**1/2 HP 90
VDC Motor**

**ITEM 10-3114
\$159.95**

• New, DAYTON model 2M168D permanent magnet motor. Removable steel base. Class H insulation.

SPECIFICATIONS

- Power 1/4 HP
- Voltage 90 DC
- Amperage 5.4 Amps
- Speed 1725 RPM
- Torque 18.3 in-lbs
- Rotation Reversible
- Service Factor 1.0



- Bearings Ball
- Enclosure TENV
- Duty Continuous
- Frame 56C
- Mount Face & base
- Shaft 5/8" x 1⁷/₈", 3/16" keyway
- Size 10⁹/₁₆" x 6¹/₂" x 7¹/₂"
- Shpg. 25 lbs.

**1/2 HP 1750 RPM
90 VDC Motor**

**ITEM 10-3123
\$109.95**

• New, LEESON precision permanent magnet DC motor. Model CM34D18NZ44A. Externally accessible brushes. Wiring box.

SPECIFICATIONS

- Catalog Number M1130334.00
- Power 1/2 HP
- Voltage 90 DC
- Amperage 8 amps
- Speed 1750 RPM
- Rotation Reversible
- Bearings Ball



- Enclosure TENV
- Duty Continuous
- Mount 4 holes on face 2⁹/₄ sq.
- Shaft 1/2" dia. x 1.45", no keyway or flat
- Size 3¹/₂" x 8" x 5¹/₄"
- Shpg. 12 lbs.

**1050 RPM
12 Volt
DC Motor**

**ITEM 10-3108
\$137.10**

• New, ARROWHEAD model SAB0191 permanent magnet motor. Ideal replacement for salt spreaders or other applications. Heavy duty leads with connectors.

SPECIFICATIONS

- Voltage 12 DC
- Amperage 1.5 Amps (no load)
- Speed 1050 RPM (no load)
- Rotation Reversible



Prop 65

- Enclosure TENV
- Duty Continuous
- Mount 4 tapped holes on face, 4³/₈" x 4³/₈"
- Shaft 3/4" dia. x 3¹/₂" w/5/16" crosshole
- Size 6¹/₂" x 7" x 5"
- Shpg. 18 lbs.

**1900 RPM
12 Volt
DC Motor**

**ITEM 10-3106
\$101.20**

• New, ARROWHEAD model SAB0121 permanent magnet motor. Ideal replacement for salt spreaders or other applications. External brush access.

SPECIFICATIONS

- Power 1/4 HP
- Voltage 12 DC
- Amperage 2.3 Amps
- Speed 1900 RPM
- Rotation Reversible
- Phase 1 Nm
- Bearings



Prop 65

- Enclosure TENV
- Duty Continuous
- Mount 4 tapped holes on face, 2⁵/₈" x 2⁵/₈"
- Shaft 1/2" dia. x 1³/₄" w/flat
- Size 3¹/₄" x 8" x 3¹/₄"
- Shpg. 11 lbs.

**925 RPM 12 Volt DC Motor
ITEM 10-3107
\$71.00**

SPECIFICATIONS

- Power 1/6 HP
- Voltage 12 DC
- Amperage 0.75 Amps (no load)
- Speed 925 RPM
- Rotation Reversible
- Enclosure TENV

- Model SAB0189
- Duty Continuous
- Mount 2 studs on face, 2⁵/₈" c/c
- Shaft 5/16" dia. x 1³/₈" w/flat
- Size 3" dia. x 4"
- Shpg. 5 lbs

Prop 65