





Cross High Speed Hydraulic Gear Motors

• Brand new CROSS hydraulic gear motors. Pressure balanced loading plates for high efficiency. Aluminum body for good heat dissipation. Pressure lubricated Teflon impregnated sleeve bearings. Internal check valves eliminate need for case drain at shaft seal pressures under 250 PSI.



40 Series SPECIFICATIONS

- PSI 3000 max.
- RPM 3000 max. cont.
- Reversible rotation
- Shaft 5/8" x 1 1/4" keyed
- Mount SAE A 2 Bolt
- Ports SAE 12 drain port 1/4" NPT
- Shpg 9 lbs.



50 Series SPECIFICATIONS

- PSI 3000 max.
- RPM 3000 max. cont.
- Reversible rotation
- Shaft 7/8" x 1 5/8" keyed
- Mount SAE B 2 Bolt
- Ports SAE 16 drain port SAE 5
- Shpg 19 lbs.

40 Series

HP and torque specifications listed at 2500 PSI

| ITEM | Displ. | GPM for | | HP at | | Price |
|------------|--------|----------|--------------|----------|--|----------|
| | | 1800 RPM | Torque | 1800 RPM | | |
| 9-7073-50 | 0.50 | 4.4 | 180 in.-lbs. | 4.8 | | \$216.15 |
| 9-7073-75 | 0.75 | 6.5 | 280 in.-lbs. | 7.5 | | \$226.15 |
| 9-7073-100 | 1.00 | 8.8 | 375 in.-lbs. | 10 | | \$236.15 |
| 9-7073-125 | 1.25 | 10.9 | 475 in.-lbs. | 13.5 | | \$246.50 |
| 9-7073-150 | 1.50 | 13 | 575 in.-lbs. | 16 | | \$256.45 |
| 9-7073-180 | 1.80 | 15.5 | 700 in.-lbs. | 20 | | \$266.45 |

50 Series

HP and torque specifications listed at 2500 PSI

| ITEM | Displ. | GPM for | | HP at | | Price |
|------------|--------|----------|---------------|----------|--|----------|
| | | 1800 RPM | Torque | 1800 RPM | | |
| 9-7074-195 | 1.95 | 17 | 775 in.-lbs. | 18 | | \$379.20 |
| 9-7074-232 | 2.32 | 20 | 900 in.-lbs. | 23 | | \$389.05 |
| 9-7074-274 | 2.74 | 23.75 | 1050 in.-lbs. | 28 | | \$398.40 |
| 9-7074-330 | 3.30 | 28.5 | 1275 in.-lbs. | 33 | | \$434.65 |
| 9-7074-380 | 3.80 | 33 | 1450 in.-lbs. | 38 | | \$434.65 |
| 9-7074-520 | 5.20 | 45 | 2000 in.-lbs. | 65 | | \$581.85 |

Compact, Hi-Torque Hydraulic Motors

• Brand New, DYNAMIC BMM series hydraulic motor. Compact frame with Rotortorc gear set to provide highly efficient low speed high torque output for limited space applications. Can be used in parallel or series hydraulic systems



SPECIFICATIONS


- Reversible rotation
- Ports SAE 6, Case Drain SAE 3
- Shaft 5/8" diam. x 1 5/16" w/ keyway
- Mount Choose between 3

- bolt 1/4-28 drilled/tapped on 1.77" B.C. or 2 Bolt on 3.15" B.C.
- Size 3 bolt mount 4 3/4" x 2 9/8" diam.
- Size 2 bolt mount 4 15/16" x 3 15/16" x 2 1/2"

| 3 Bolt Mount | | 2 Bolt Mount | | Displ. | PSI | | Torque in lbs. | | RPM | | GPM | | Shpg | PRICE |
|--------------|------------|--------------|-----------|--------|-------|------|----------------|------|-------|------|-------|----------|------|-------|
| ITEM # | ITEM # | Cont. | Int. | | Cont. | Int. | Cont. | Int. | Cont. | Int. | Cont. | Int. | | |
| 9-12221-8 | 9-12222-8 | 0.5 | 1450 2030 | 97 | 132 | 1950 | 2450 | 3.96 | 5.28 | 6 | | \$161.25 | | |
| 9-12221-12 | 9-12222-12 | 0.76 | 1450 2030 | 141 | 203 | 1550 | 1940 | 5.28 | 6.6 | 6 | | \$161.70 | | |
| 9-12221-20 | 9-12222-20 | 1.21 | 1450 2030 | 221 | 310 | 1000 | 1250 | 5.28 | 6.6 | 7 | | \$166.00 | | |
| 9-12221-32 | 9-12222-32 | 1.93 | 1450 2030 | 354 | 504 | 630 | 800 | 5.28 | 6.6 | 7 | | \$168.35 | | |
| 9-12221-40 | 9-12222-40 | 2.43 | 1233 1740 | 398 | 620 | 500 | 630 | 5.28 | 6.6 | 7 | | \$170.70 | | |
| 9-12221-50 | 9-12222-50 | 3.07 | 1015 1450 | 407 | 779 | 400 | 500 | 5.28 | 6.6 | 7 | | \$173.55 | | |

Parker MGG Hydraulic Motors

• Brand new, PARKER MGG Series. Gerotor design hydraulic motor. Heavy duty roller bearings, aluminum case, Buna-N seals. Can also be used as a pump up to 3500 RPM max. Wide range of displacement, mounting and port location options to fit specific applications.

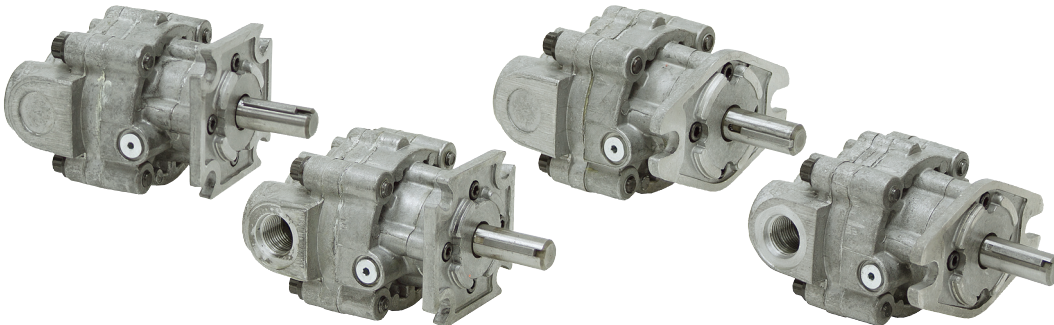

SPECIFICATIONS FOR ALL

- Speed: 5000 RPM max as motor, 3500 RPM max as pump
- Rotation reversible
- Shaft 5/16" x 1 1/2" w/ 1/8" keyway
- Size 5 1/2" x 3 1/2" x 3 3/8"
- Shpg. 5 lbs.

| Displ. cu. in. | Motor Model | 4 Bolt Mount | | | | 2 Bolt Mount | | | | Price | GPM for Max. PSI | | PSI Int. | Torque in. lbs. | Port |
|----------------|-------------|--------------|-------|------------|-------|--------------|-------|------------|-------|----------|------------------|-------|----------|-----------------|--------|
| | | Rear Ports | | Side Ports | | Rear Ports | | Side Ports | | | RPM | Cont. | | | |
| 0.218 | MGG20010 | 9-8499 | BB1A3 | 9-4765 | BB1B3 | 9-1180 | BA1A3 | 9-6590 | BA1B3 | \$259.80 | 4.75 | 2000 | 2500 | 70 | SAE 8 |
| 0.372 | MGG20016 | 9-8500 | BB1A3 | 9-4766 | BB1B3 | 9-1181 | BA1A3 | 9-6591 | BA1B3 | \$268.45 | 8.05 | 2000 | 2500 | 118 | SAE 8 |
| 0.45 | MGG20020 | 9-8501 | BB1A3 | 9-4767 | BB1B3 | 9-1182 | BA1A3 | 9-6592 | BA1B3 | \$276.95 | 9.75 | 2000 | 2500 | 144 | SAE 8 |
| 0.58 | MGG20025 | 9-8502 | BB1A3 | 9-4768 | BB1B3 | 9-1183 | BA1A3 | 9-6593 | BA1B3 | \$285.60 | 12.55 | 2000 | 2500 | 184 | SAE 10 |
| 0.7 | MGG20030 | 9-8503 | BB1A3 | 9-4769 | BB1B3 | 9-1184 | BA1A3 | 9-6594 | BA1B3 | \$293.85 | 15.15 | 1500 | 2000 | 222 | SAE 10 |