

**12 VDC  
2550 RPM  
Motor**



**ITEM 10-3064  
\$94.95**

• Brand new, Buyer's Products model# 1306007 snow plow motor. Replacement motor for many hydraulic power packs.

**SPECIFICATIONS**

- Voltage 12 VDC
- Amperage 200 Amps, Max.
- Speed 2550 RPM
- Rotation Clockwise
- Enclosure TENV
- Duty Intermittent
- Face Mount Two thru-holes on 3/16" centers for 1/4" O.D. bolts
- Shaft 5/8" O.D. shaft w/ 1/4" wide female tang
- Size 6 3/4" L x 4 1/2" housing dia.
- Shpg. 16 lbs.


**1800 RPM Motors**

• Brand new, WORLDWIDE ELECTRIC permanent magnet motors. Bolt on/off steel base. Class F insulation. 20:1 speed range at constant torque.



**SPECIFICATIONS FOR ALL**

- Voltage 12 DC
- Speed 1800 RPM
- Rotation reversible
- Service factor 1.0
- Bearings ball
- Duty continuous
- Frame 56C
- Mount face & base
- Shaft 5/8" x 1 7/8" w/ 3/16" keyway

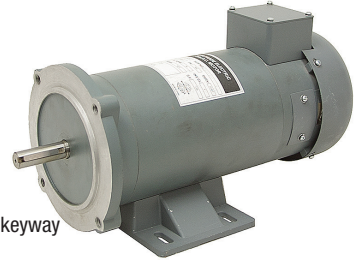

**12 VDC**

ITEM	HP	Amps	Torque	Enclosure	Size	Shpg.	Price
10-2571	1/3	26.4	0.97 lb.ft.	TENV	8.1" x 5.87" x 7.63"	20 lbs.	\$218.85
10-2572	1/2	40	1.46 lb.ft.	TENV	10" x 5.87" x 7.63"	23 lbs.	\$258.25
10-2573	3/4	61.2	2.19 lb.ft.	TEFC	11.4" x 5.87" x 7.63"	30 lbs.	\$303.15
10-2574	1	82.2	2.92 lb.ft.	TEFC	12.2" x 5.87" x 7.63"	35 lbs.	\$337.50

**90 VDC**

See page 160 for compatible speed controllers.

ITEM	HP	Amps	Torque	Enclosure	Size	Shpg.	Price
10-2575	1/3	3.5	0.97 lb.ft.	TENV	8.1" x 5.87" x 7.63"	21 lbs.	\$190.00
10-2576	1/2	5.2	1.46 lb.ft.	TENV	10" x 5.87" x 7.63"	23 lbs.	\$258.50
10-2577	3/4	7.8	2.19 lb.ft.	TEFC	11.4" x 5.87" x 7.63"	30 lbs.	\$293.70
10-2578	1	10.4	2.92 lb.ft.	TEFC	12.2" x 5.87" x 7.63"	33 lbs.	\$308.90
10-2579	1 1/2	15.4	4.38 lb.ft.	TEFC	14.38" x 5.87" x 7.63"	40 lbs.	\$333.80

**0.4 HP, 24 VDC  
Motor**



**ITEM 10-3016  
\$119.95**

• New, AMETEK-PITTMAN precision permanent magnet DC motor. Model 3334-M5156. Could also be used as a direct current generator.

**SPECIFICATIONS**

- Power 0.4
- Voltage 24 DC
- Amperage 15 amps
- Speed 1800 RPM
- Rotation reversible
- Bearings ball
- Enclosure TENV
- Duty continuous
- Torque 225 oz. in.
- Mount 4 holes on face 2 3/4" square
- Shaft 1/2" dia. x 1 1/8" w/ 1/8" keyway
- Size 3 1/4" x 3 1/4" x 8"
- Shpg. 12 lbs.

**Winch Motor**



**ITEM 10-1839  
\$89.25**

• Brand new. Built as replacement motor for commercial winches. Series wound.

**SPECIFICATIONS**

- Voltage 12 DC
- Amps 50 no load
- RPM 8000
- Rotation reversible
- Duty intermittent
- Frame 3" pilot ring
- Mount 4 tapped holes 4" BC
- Shaft 3/4" diam. x 1 1/4"
- w/keyway
- Size 4" x 4" x 7 3/4"
- Shpg. 22 lbs.

**1050 RPM  
12 Volt  
DC Motor**



**ITEM 10-3108  
\$146.35**

• New, ARROWHEAD model SAB0191 permanent magnet motor. Ideal replacement for salt spreaders or other applications. Heavy duty leads with connectors.

**SPECIFICATIONS**

- Voltage 12 DC
- Amperage 1.5 Amps (no load)
- Speed 1050 RPM (no load)
- Rotation Reversible
- Enclosure TENV
- Duty Continuous
- Mount 4 tapped holes on face, 4 3/8" x 4 3/8"
- Shaft 3/4" dia. x 3 1/2" w/ 5/16" crosshole
- Size 6 1/2" x 7" x 5"
- Shpg. 18 lbs.



**12 VDC  
Motor**

**ITEM 10-2893  
\$29.95**

• New, permanent magnet motor. Built to drive agricultural spray pumps. 5 mounting bosses on front cover for attaching pump. Could also be used as DC generator. Rubber isolators for holes in mounting base.

**SPECIFICATIONS**

- Power 1/4 HP
- Voltage 12 DC
- Speed/Amps 2600 RPM, 2.2 amps no load
- 2300 RPM, 25 amps, 7 in.lbs. torque
- Rotation reversible
- Bearings ball
- Enclosure TENV
- Duty continuous
- Frame rigid welded base
- Mount 4 1/8" x 2 1/2"
- Shaft 5/16" dia. x 1 1/16" w/flat
- Size 4 1/4" dia. x 4 1/2"
- Shpg. 8 lbs.

**1/2 HP 90  
VDC Motor**



**ITEM 10-3114  
\$159.95**

• New, DAYTON model 2M168D permanent magnet motor. Removable steel base. Class H insulation.

**SPECIFICATIONS**

- Power 1/4 HP
- Voltage 90 DC
- Amperage 5.4 Amps
- Speed 1725 RPM
- Torque 18.3 in-lbs
- Rotation Reversible
- Service Factor 1.0
- Bearings Ball
- Enclosure TENV
- Duty Continuous
- Frame 56C
- Mount Face & base
- Shaft 5/8" x 1 7/8", 3/16" keyway
- Size 10 1/16" x 6 1/2" x 7 1/2"
- Shpg. 25 lbs.

**1/2 HP 1750 RPM  
90 VDC Motor**



**ITEM 10-3123  
\$109.95**

• New, LEESON precision permanent magnet DC motor. Model CM34D18NZ44A. Externally accessible brushes. Wiring box.

**SPECIFICATIONS**

- Catalog Number M1130334.00
- Power 1/2 HP
- Voltage 90 DC
- Amperage 8 amps
- Speed 1750 RPM
- Rotation Reversible
- Bearings Ball
- Enclosure TENV
- Duty Continuous
- Mount 4 holes on face 2 3/4" sq.
- Shaft 1/2" dia. x 1.45", no keyway or flat
- Size 3 1/2" x 8" x 5 1/4"
- Shpg. 12 lbs.

**1/4 HP 90  
VDC  
Motor**



**ITEM 10-3113  
\$139.95**

• New, DAYTON model 2M167D permanent magnet motor. Removable steel base. Class H insulation.

**SPECIFICATIONS**

- Power 1/4 HP
- Voltage 90 DC
- Amperage 3 Amps
- Speed 1725 RPM
- Torque 9 in-lbs
- Rotation Reversible
- Service Factor 1.0
- Bearings Ball
- Enclosure TENV
- Duty Continuous
- Frame 56C
- Mount Face & base
- Shaft 5/8" x 1 7/8", 3/16" keyway
- Size 8 5/16" x 6 1/2" x 7 1/2"
- Shpg. 19 lbs.

**1900 RPM  
12 Volt  
DC Motor**



**ITEM 10-3106  
\$101.20**

• New, ARROWHEAD model SAB0121 permanent magnet motor. Ideal replacement for salt spreaders or other applications. External brush access.

**SPECIFICATIONS**

- Power 1/4 HP
- Voltage 12 DC
- Amperage 2.3 Amps
- Speed 1900 RPM
- Rotation Reversible
- Phase 1 Nm
- Bearings
- Enclosure TENV
- Duty Continuous
- Mount 4 tapped holes on face, 2 3/8" x 2 3/8"
- Shaft 1/2" dia. x 1 3/4" w/flat
- Size 3 1/4" x 8" x 3 1/4"
- Shpg. 11 lbs.

**925 RPM 12 Volt DC Motor**

**\$71.00**

**ITEM 10-3107**

**SPECIFICATIONS**

- Power 1/6 HP
- Voltage 12 DC
- Amperage 0.75 Amps (no load)
- Speed 925 RPM
- Rotation Reversible
- Enclosure TENV
- Model SAB0189
- Duty Continuous
- Mount 2 studs on face, 2 3/8" c/c
- Shaft 5/16" dia. x 1 3/8" w/flat
- Size 3" dia. x 4"
- Shpg. 5 lbs