

Single Acting Telescoping Cylinders

4" x 20"



ITEM 9-9667-A

\$399.95

• 5.5" x 5.5" mounting flange with 1/2" holes on 4.25" centers.

SPECIFICATIONS

- Unused, old inventory
- Single Acting
- Main Cyl Bore x Total Stroke 4" x 20"
- Number of Stages 3"
- Pressure 2500 PSI
- Rod Dia. 1.5"
- Ports SAE 8
- Overall Length 12"
- Flat Ends
- Base to Mount 8.5"
- Shpg. 40 lbs.

6.25" x 63.75" x 3.75"



ITEM 9-8220

\$899.99

SPECIFICATIONS

- New
- Single acting, telescoping
- Main cylinder bore x total stroke 6 1/4" x 63 3/4"
- Number of stages 3
- Pressure 2000 PSI max.
- Rod dia. 3 3/4"
- Port SAE 12 w/ restrictor
- Retracted lgth. 35 1/4"
- Rod tang 2" thick
- Base crosstube 7 1/4" w.
- Pin holes rod 2", base 3.61"
- Shpg. 260 lbs.

Truck freight only.

5.25" x 166.125" x 2.75"



ITEM 9-9394

\$1049.95

• Port in end of rod.

SPECIFICATIONS

- Unused, old inventory
- Single acting, telescoping
- Main cylinder bore x total stroke 5 1/4" x 166 1/8"
- Number of stages 3
- Pressure 2000 PSI max.
- Rod dia. 2 3/4"
- Port SAE 12
- Retracted lgth. 11 1/4"
- Rod tang w/ swivel eye 2"
- Pin hole 1 1/2"
- Male trunnion trunnion pin width outside 12 3/8", inside 9" pin ctr. to rod pin ctr. 11 1/4"
- Pin ctr. to base end 61 1/2"
- trunnion pin 1 1/4"
- Shpg. 370 lbs.

Truck freight only.

8.5" x 46.875" x 6.75"



ITEM 9-9621

\$999.99

SPECIFICATIONS

- Unused old inventory
- Single acting, telescoping
- Main cylinder bore x total stroke 8 1/2" x 46 7/8"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 6 3/4"
- Ports 1" NPT
- Retracted lgth. 34 1/4"
- Tang ends 2" thick
- Pin holes 1 1/2"
- Shpg. 330 lbs.

Truck freight only.

5.5" x 73.625"



ITEM 9-210489

\$799.95

SPECIFICATIONS

- Single Acting
- Unused old inventory
- Main Cyl Bore x Total Stroke 5.5" x 73.625"
- Thickness 0.254"
- Number of Stages 3
- Pressure 2000
- Rod Dia. 3"
- Ports 1/2" NPT
- Retracted Length 8.5"
- Rod End: Thru-Hole Width 1.31"
- Pin Center to Base/Rod End 2.5"
- Pin Hole 1-1/2"
- Base End: Male Trunnion Pin Outside/Inside Width 8.75" / 7"
- Pin-Center-To-Rod Pin Center 8.5"
- Pin Center To Base End 26"
- Pin Diameter 1.75"
- Shpg. 149 lbs.

Truck freight only.

9.75" x 66"



ITEM 9-8846

\$1495.95

SPECIFICATIONS

- New
- Single acting, telescoping
- Tang Ends
- Rod End Pin Center to Tang End 2 1/4"
- Rod End Pin Hole 2 1/2"
- Base End Pin Center to Tang End 2 1/2"
- Base End Pin Hole 3"
- Max Thickness 3"
- Main Cyl Bore x Total Stroke 9 3/4" x 66"
- Number of Stages 3
- Pressure 2500 PSI max.
- Rod Dia. 6", Hollow
- Rod Thickness 1/4"
- Port SAE 24
- Retracted Length 41 1/4"
- Shpg. 575 lbs.

Truck freight only.

5.5" x 118.5" x 4"



ITEM 9-10415

\$1195.95

SPECIFICATIONS

- New, HYCO
- Double acting, telescoping
- Main cylinder bore x total stroke 5 1/2" x 118 1/2"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 4"
- Ports SAE 16
- Retracted lgth. 97 1/2"
- Rod tang with swivel eye 2 1/2" thick
- Base crosstube 7 3/4" w.
- Pin holes 2"
- Shpg. 400 lbs.

Truck freight only.

ITEM 9-12285

\$1395.95

SPECIFICATIONS

- Single Acting
- Unused old inventory
- Main Cyl Bore x Total Stroke 9.836"(250mm) x 220"(5588mm)
- Thickness 0.598"
- Number of Stages 5
- Pressure 2000
- Rod Dia. 5"(127mm)
- Ports 1" NPT
- Retracted Length 61"
- Rod End: Tang Thickness, Max 2"
- Pin-Center-To-Tang-End 1.635"
- Base End: Cross-Tube O.D. 3.12"
- Width 10.75"
- Shpg. 930 lbs.

Truck freight only.

4.75" x 63" x 2.75"



ITEM 9-9583

\$878.95

SPECIFICATIONS

- New
- Double acting, telescoping
- Main cylinder bore x total stroke 4 3/4" x 63"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 2 3/4"
- Ports SAE 14
- Retracted lgth. 68"
- Crosstube ends rod 6 3/8" w., base 5" w.
- Pin holes 2"
- Shpg. 360 lbs.

Truck freight only.

5.25" Bore Cylinders



5.25" x 56.25" x 3.75"

ITEM 9-8225

\$599.99

SPECIFICATIONS

- New
- Double acting, telescoping
- Main cylinder bore x total stroke 5 1/4" x 56 1/4"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 3 3/4"
- Extend port SAE 12
- Retracted port SAE 16
- Retracted lgth. 65 1/2"
- Tang ends with swivel eye 1.377" (35mm) thick
- Pin holes rod 1.969" (50mm), base 1.972" (50mm)
- Shpg. 320 lbs.

Truck freight only.

5.25" x 73.75" x 3.75"

ITEM 9-8224

\$799.99

SPECIFICATIONS

- New
- Double acting, telescoping
- Main cylinder bore x total stroke 5 1/4" x 73 3/4"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 3 3/4"
- Extend port SAE 16
- Retracted port SAE 12
- Retracted lgth. 65 1/4"
- Tang ends with swivel eye 1 3/8" thick
- Pin holes 50mm
- Shpg. 305 lbs.

Truck freight only.

5.5" x 54.25" x 4"



ITEM 9-7525

\$799.00

SPECIFICATIONS

- New
- Double acting, telescoping
- Main cylinder bore x total stroke 5 1/2" x 54 1/4"
- Number of stages 2
- Pressure 2000 PSI max.
- Rod dia. 4"
- Ports SAE 16
- Retracted lgth. 58"
- Rod tang with swivel eye 2 1/2" thick
- Base crosstube 8 1/4" w.
- Pin holes 2"
- Shpg. 285 lbs.

Truck freight only.

5.5" x 96" x 1.5"



ITEM 9-10167

\$699.95

• Unused old inventory. Single acting two stage, telescoping hydraulic cylinder.

SPECIFICATIONS

- Single Acting
- Main Cyl Bore x Total Stroke 5.5" x 96"
- Thickness 0.271"
- Number of Stages 2
- Pressure 2000
- Rod Dia. 1.5"
- Ports SAE 24
- Snap ring groove ends
- Retracted Length 81.25" (snap ring groove to groove)
- Rod end: 1" x 2.375"
- Base end: 1" x 1.625"
- Shpg. 305 lbs.

Truck freight only.

Bore - Inside diameter of cylinder


Stroke - How far a cylinder extends out

R-length - Distance in inches between pin centers when cylinder is retracted

Rod Diameter - Diameter of cylinder rod

Single Acting - Cylinder is powered one way

Cylinders Definitions

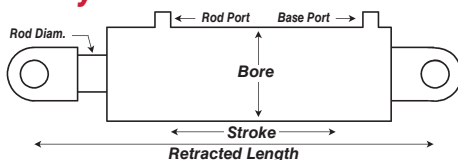

Double Acting - Cylinder is powered both ways (two way)

Crosstube End - Round tube welded perpendicular to cylinder

Single Eye End - For mounting between two mounting ears.

Clevis End - Two mounting ears