



Water System Automatic Pressure Switches

• Brand new, LEFOO automatic pressure switch for automatic water systems. Automatically turns pump ON or OFF at set values. Adjustable differential. Sturdy plastic housing. Single port.

ITEM 4-1822

\$13.95

SPECIFICATIONS

- Contact ratings
1 1/2 HP at 120 VAC
2 HP at 230 VAC
3 HP at 240 VAC 3Ph
- Factory setting
ON (cut-in) 40 PS
OFF (cut-out) 60 PSI



- Min. ON (cut-in) 20 PSI
- Max. OFF (cut-out) 80 PS
- Differential 15-35 PSI
- Port 1/4" NPT
- Size 3/4" x 2 5/8" x 3 3/4"
- Shpg. 1 1/2 lbs.

ITEM 4-1821

\$13.95

SPECIFICATIONS

- Contact ratings
1 1/2 HP, 20 amps at 120 VAC
2 HP, 12 amps at 240 VAC
3 HP, 9.6 amps at 240 VAC 3Ph
- Factory setting
ON (cut-in) 30 PS
OFF (cut-out) 50 PSI



- Min. ON (cut-in) 30 PSI
- Max. OFF (cut-out) 100 PS
- Differential 20-35 PSI
- Port 1/4" NPT
- Size 3 1/2" x 2 1/4" x 3 1/8"
- Shpg. 1 1/2 lbs.

Windshield Washer Pump

ITEM 2-1442

\$8.99

• New, windshield washer pump. Mounts thru grommet on side of reservoir (not included). Recessed two prong electrical connection.

SPECIFICATIONS

- Pump Voltage 12 VDC
- Mount 0.65 OD barb for grommet
- Outlet 3/16" hose barb
- Size 1 3/8" dia. x 3 3/4"
- Shpg. 1 lb.



1/2 HP Red Lion Jet Pump

ITEM 2-1462
\$229.95

• New. 1/2 HP Red Lion RJC-50-PREM-SP Jet Pump. Convertible jet pump for either shallow well (less than 25 ft.) single pipe or deep well (25-90 ft.) two pipe applications. Thermoplastic impeller and diffuser. Premium heavy duty dual voltage motor. Pressure switch is factory pre-set 30 PSI on /50 PSI off. Pressure gauge included.

SPECIFICATIONS

- Voltage 115/230 Volts AC
- Amperage 14.4/7.2 @ 115/230 Volts
- Pressure 64 PSI MAX
- Power 1/2 HP
- Gallons 14.2 GPM MAX
- Inlet Port 1 1/4" NPT
- Discharge Port 1" NPT
- Size 10.5" x 20" x 10.5"
- Flow Rates for shallow well
14.2 GPM @ 5 ft. of lift
13.5 GPM @ 15 ft. of lift
- Flow Rates for deep well
9.6 GPM @ 25 ft. of lift
5.8 GPM @ 30 ft. of lift
4.3 GPM @ 60 ft. of lift
1.6 GPM @ 90 ft. of lift
- Shpg 45 lbs.



1/2 HP Shallow Well Jet Pump

ITEM 2-1466
\$249.95

• New. Red Lion RL-SWJ50-SP Shallow well jet pump. Ideal for use in depths of 25 feet or less. Cast iron construction. Preset 30/50 pressure switch produces up to 50 PSI w/ automatic shutoff. 115/230 volt heavy duty TEFC motor.

SPECIFICATIONS

- Voltage 115/230
- Amperage 8.4 @ 115V 4.2 @ 230V
- Pressure 64 PSI MAX
- Power 1/2 HP
- Gallons 12.6 GPM MAX
- Inlet Port 1 1/4" NPTF
- Discharge Port 1" NPTF
- Gauge Port 1/8" NPTF
- Flow Rates for shallow well:
13.6 GPM @ 5 ft. of lift
9.7 GPM @ 15 ft. of lift
4.7 GPM @ 25 ft. of lift
- Size 12" x 17.25" x 11.75"
- Shpg 25 lbs.




140 GPM Centrifugal Pump

ITEM 2-1222
\$472.95

• Brand new, HYPRO 9203C cast iron centrifugal pedestal mount pump. Ideal for high volume spraying systems. Viton seals.

SPECIFICATIONS

- Model 9203C
- Max. 6000 RPM
- 1 1/2" NPT inlet port
- 1 1/4" NPT outlet port
- Rotation CCW
- Max. temp. 140° F
- 2 bolt pedestal mount on 3" centers
- Shaft 5/8" outside dia. x 2 1/8" long w/ 3/16" keyway
- Size: 7 3/8" x 7 1/4" x 8 1/4"
- Shpg. 21 lbs.



Line Strainers

• Brand new HYPRO. Keeps debris from being drawn thru pump. Provides longer component life and less downtime.

SPECIFICATIONS

- Polypropylene construction
- EPDM gasket
- 80 PSI at 70 degrees F.
- 50 mesh stainless steel screen
- Shpg. 1 lb.



ITEM 20-997

• 1/2" NPT, 7.7 sq. in. open area, 3.6" x 2.95" x 5.35"

\$14.60

ITEM 20-998

• 3/4" NPT, 7.7 sq. in. open area, 3.6" x 2.95" x 5.35"

\$15.75


ITEM 20-999

• 1" NPT, 13.5 sq. in. open area, 5" x 4.1" x 6.35"

\$21.45

Shurflo Diaphragm Pumps

• Brand new, SHURFLO automatic demand diaphragm pumps. Ideal for spot sprayers. Santoprene diaphragm and Viton valves. Can run dry intermittently. Rubber mounting feet. Intermittent duty. Automatic on/off pressure switch. Use adapters shown below for 1/2" MSPT ported items (metal fittings and rigid pipe are not recommended). Wire leads on DC models, 6 ft. power cord on AC model.

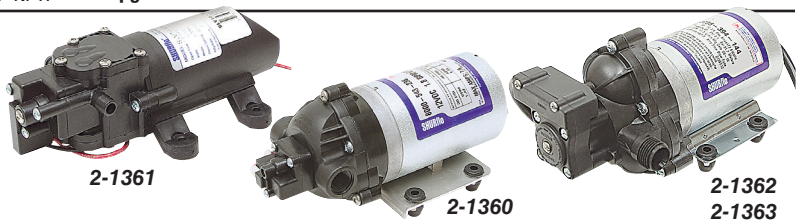

ITEM	Model	Volts	Amps	Open Flow	Max. GPM at PSI	PSI	Ports	Switch Settings on/off	Self Priming Lift max.	Size	Shpg.	Price
2-1361	SLV10-AA41	12 DC	4	1 GPM	0.49 at 30	50	3/8" hosebarb	25/40 PSI	2 1/2 ft.	7" x 3 5/8" x 2 3/8"	3 lbs.	\$69.95
2-1360	8000-543-236	12 DC	6.4	1.8 GPM	1.4 at 40	50	3/8" NPTF	30/50 PSI	8 ft.	8 1/4" x 4" x 4 1/2"	6 lbs.	\$124.60
2-1362	2088-343-135	12 DC	7.7	3 GPM	2.05 at 40	40	1/2" MSPT	25/45 PSI	12 ft.	8 3/4" x 6" x 4 1/2"	6 lbs.	\$148.70
2-1363	2088-394-144	115 AC	0.9	3 GPM	1.6 at 40	40	1/2" MSPT	25/45 PSI	12 ft.	9" x 5 1/4" x 4 7/8"	6 lbs.	\$226.75

Shurflo Hosebarb to Pipe Fittings

• Brand new Shurflo polypropylene hosebarb to pipe fittings.

ITEM	Style	Description	Hose ID	NPT Fitting	Shpg.	Price
2-1366	A	Straight	3/8"	1/2" NPTF Swivel	1/4 lb.	\$1.10
2-1367	A	Straight	1/2"	1/2" NPTF Swivel	1/4 lb.	\$1.00
2-1364	A	Straight	5/8"	1/2" NPTF Swivel	1/4 lb.	\$2.05
2-1365	A	Straight	3/4"	1/2" NPTF Swivel	1/4 lb.	\$1.25
2-1369	B	Elbow	3/8"	1/2" NPTF Swivel	1/4 lb.	\$1.00

ITEM	Style	Description	Hose ID	NPT Fitting	Shpg.	Price
2-1368	B	Elbow	1/2"	1/2" NPTF Swivel	1/4 lb.	\$1.00
2-1371	B	Elbow	5/8"	1/2" NPTF Swivel	1/4 lb.	\$1.75
2-1370	B	Elbow	3/4"	1/2" NPTF Swivel	1/4 lb.	\$1.25
2-1372	C	Straight	3/8"	3/8" NPTM	1/4 lb.	\$0.50
2-1374	C	Straight	1/2"	1/2" NPTM	1/4 lb.	\$2.55