



**5 HP,  
230 VAC  
Motors**

• Brand new, LEESON. General purpose heavy duty motors for air compressors, pumps. No thermal overload.

**SPECIFICATIONS FOR BOTH**

- Power 5 HP
- Voltage 208-230 AC
- Rotation reversible
- Phase 1
- Service factor 1.15
- Bearings ball
- Enclosure ODP
- Duty Continuous
- Frame 184T
- Mount rigid welded base
- Shaft 1 1/8" dia. x 2 3/4" w/ 1/4" keyway

**ITEM 10-1435  
SPECIFICATIONS**

- Model 131537
- Speed 1740 RPM

**\$807.55**

- Amperage 23-21 amps
- Size 12 1/2" x 10 9/4" x 8"
- Shpg. 90 lbs.

**ITEM 10-2753  
SPECIFICATIONS**

- Model 131616
- Speed 3600 RPM

**\$728.00**

- Amperage 24-22 amps
- Size 12 1/4" x 11" x 11 1/4"
- Shpg. 87 lbs.



**5 HP  
208-230 VAC  
Compressor  
Duty Motor  
\$375.55**

• Brand new, LEESON ELECTRIC Model 116523 motor. Special duty motor designed to replace motors on compressors. Motor is rated for a breakdown torque of 5 HP and a continuous compressor duty at 3 HP. Overload protection with manual reset. Steel frame and base. Welded base. Capacitor start/capacitor run.

• Confirm your motor name plate data tag including voltage, amperage, speed, frame and shaft diameter to match this motor specifications for proper operation.

**SPECIFICATIONS**

- 5 HP Definite Purpose Special Compressor Duty
- Voltage 208-230 VAC
- Amperage 15 Amps
- Speed 3450 RPM
- Phase 1
- Rotation Reversible
- Service factor 1.0
- Bearings Ball
- Enclosure ODP
- Cont. compressor duty
- Frame 56H
- Mount base
- Shaft 5/8" diam. x 1 7/8" w/ 3/16" keyway
- Size 9 1/4" x 7" x 8"
- Shpg. 38 lbs.



**1.5 HP 3490  
RPM Motor  
\$159.95**


**ITEM 10-3281**

• New, WEG electric motor model# MO0C0C0J0000100646 capacitor-start. Thermal overload protection with automatic reset.

**SPECIFICATIONS**

- Power 1 1/2 HP
- Voltage 115/208-230 AC
- Phase 1
- Frequency 60 Hz
- Amperage 17/9.35-8.5 Amps
- Speed 3490 RPM
- Rotation CCW
- Service Factor 1.3
- Thermal Overload Protection Manual

- Enclosure ODP
- Duty Continuous
- Frame E56J
- Face Mount: Four 3/8"-16 tapped holes on 5/8" diameter bolt circle
- Rigid Base Mount: Six 0.34" diam. holes on 4 7/8" x 3" to 5" centers
- Shaft 5/8" dia. x 1 3/4" w/ 7/16-20 thread 1 1/16" long
- Size 13 1/2" x 6 1/2" x 8"
- Shpg. 36 lbs.

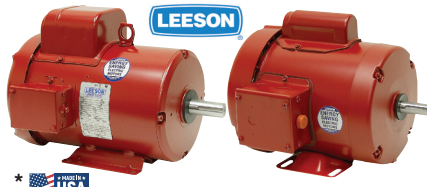

**Leeson Farm Duty Motors**

• Brand new LEESON heavy duty motors. High starting torque. Totally enclosed fan cooled with double shielded ball bearings for outdoor use. Capacitor start. Manual reset thermal overload protection. Cont. duty, reversible rotation, rigid mount. Single phase.

ITEM	HP	Voltage	Amps	RPM	Frame	Shaft	Shpg.	Price
10-1024*	1/2	115/230	8.8/4.4	1725	56	5/8"	25 lbs.	\$316.90
10-1025*	3/4	115/230	10.8/5.4	1725	56	5/8"	28 lbs.	\$381.85
10-1026*	1	115/230	14/7	1725	56	5/8"	32 lbs.	\$429.60
10-1027*	1 1/2	115/230	17.2/8.6	1725	56	5/8"	41 lbs.	\$521.05
10-1028*	2	230	9.2	1725	56Hz	7/8"	48 lbs.	\$597.20
10-1029	3	230	19	1740	184T	1 1/8"	99 lbs.	\$834.40
10-1323	5	230	23	1740	184T	1 1/8"	106 lbs.	\$1030.00
10-1324	7 1/2	230	33.6	1740	215T	1 3/8"	165 lbs.	\$1379.30
10-1325	10	230	40	1740	215T	1 3/8"	197 lbs.	\$1712.30



**Leeson Crop Dryer Motors**

• Brand new LEESON crop dryer motors. For use in air over and fan shaft design. Thermostats provide thermal overload protection. Steel housing. Grey epoxy painted. Double sealed ball bearings. Motor venting protected against insects and rodents. End of shaft tapped 1/4-20. Capacitor start and run motor. Capacitor shipped loose.


\*Products drop-shipped from the manufacturer are not returnable.

**SPECIFICATIONS**

- Voltage 230 VAC
- Ball Bearings
- Speed 3450 RPM
- Continuous Duty
- Rotation Reversible
- Base Mount
- Phase 1
- SF 1.0
- ODP

ITEM	HP	Amps	Frame	Shaft	Shpg.	Price
**10-3385 *	3	12	145TZ	7/8" dia. x 2 1/4"	50 lbs.	\$660.10
10-2766 *	5-7.5	27.2-35	182TZ	1 1/8" dia. x 3 1/2"	94 lbs.	\$833.85
10-2767 *	7.5-10	31-42	182TZ	1 1/8" dia. x 3 1/2"	98 lbs.	\$994.55
10-2768 *	10-15	39.5-61.5	213TZ	1 1/8" dia. x 4 1/2"	195 lbs.	\$1275.70

\*\*MARATHON



**1/3 HP 1800 RPM  
230 VAC Motor  
\$42.95**

**ITEM 10-3336**

• Ideal replacement motor for air conditioning units. Thermal overload protection with automatic reset. Requires 5 MFD capacitor (Not Included).

**SPECIFICATIONS**

- Brand Marathon
- Model X204
- Power 1/3 HP
- Voltage 230 VAC
- Phase 1
- Frequency 60 HZ
- Amps 2.5
- Speed 1800 RPM 3 Speeds
- Rotation CCW
- Service Factor 1.0
- Capacitor 5 MFD 370 Volt
- Thermal Overload Protection Automatic
- Enclosure OPAO
- Duty Continuous
- Frame 48Y
- Mount 3 hole lug
- Shaft 1/2" dia. x 2 3/16" : 1/2" dia. x 4 5/16"
- Size 4 1/2" x 7 5/8" x 7 1/4"
- Shpg. 14 lbs.



**3/4 HP 3600 RPM  
115/230 Volt  
AC Motor  
\$49.95**

**ITEM 10-3129**

• New, Century Electric model# C48AB86A03.

**SPECIFICATIONS**

- Power 3/4 HP
- Voltage 110/220 VAC
- Phase 1
- Frequency 60 Hz
- Amperage 10/5 Amps no load
- Speed 3600 RPM
- Rotation CCW
- Service Factor 1
- Bearings Ball
- Enclosure ODP
- Thermal Overload Protection Automatic
- Duty Continuous
- Frame 48Y
- Face Mount
- Shaft 5/8" dia. x 1 1/8" smooth then threaded 1/2-20 x 3/4" (2-1/8" overall length)
- Size 11 1/4" x 6 1/2" x 6 1/2"
- Shpg. 20 lbs.



**1/3 HP 1800 RPM  
Carbonator Motor  
\$36.95**

**ITEM 10-3335**

• New, MARATHON electric carbonator motor. Thermal overload protection with automatic reset.

**SPECIFICATIONS**

- Brand Marathon
- Model 5KH32GNC232X
- Power 1/3 HP
- Voltage 230 AC
- Phase 1
- Frequency 60 Hz
- Amperage 2.8 Amps
- Speed 1725 RPM
- Rotation Reversible
- Service Factor 1.00
- Enclosure ODP
- Thermal Overload Protection Automatic
- Duty Continuous
- Frame 48Y
- Base Mount Four 0.33" on 2 3/4" x 4 1/4" to 5" centers
- Face Mount 1 7/8" male pilot ring
- Shaft 5/8" dia. w/ 3/16" female tang
- Size 7 3/4" x 5 1/2" x 6"
- Shpg. 16 lbs.



**3/4 HP 3460  
RPM Motor  
\$164.95**

**ITEM 10-3282**

• New, WEG electric motor model# TE01C040J0000101862 and inverter duty.

**SPECIFICATIONS**

- Power 3/4 HP
- Voltage 208-230/460 AC
- Phase 3
- Frequency 60 Hz
- Amperage 2.5-2.3/1.15 Amps
- Speed 3460 RPM
- Rotation CCW
- Service Factor 1.15
- Enclosure TEFC
- Duty Continuous
- Frame B56J
- Face Mount
- Four 3/8"-16 tapped holes on 5/8" diameter bolt circle
- Rigid Base Mount Four 0.34" diam. holes on 4 7/8" x 3"
- Shaft 5/8" dia. x 1 3/4" smooth w/ 7/16-20 thread 1 1/16" long
- Size 12 1/2" x 8 5/8" x 7"
- Shpg. 27 lbs.