

Dimensional Data for Prince Cylinders on this page

Bore	Crosstube Width			
	A	L1	L2	
4"	2 1/4"	4 3/4"	3 1/4"	
4 1/2"	2 1/4"	5 1/4"	3 1/4"	
5"	2 1/16"	5 3/4"	4"	
6"	2 1/16"	6 3/4"	4"	
8"	3"	9"	5"	

### Prince Gladiator Heavy Duty Cylinders



• Brand new PRINCE "Gladiator" line. Welded, double acting cylinders with fully chromed piston rod. 3000 PSI working pressure.

**SPECIFICATIONS:** Ports SAE 12, 1 1/2" dia. pins.


ITEM	Stroke	Rod Retracted		Shpg.	Price
		Dia.	Lgth.		
9-12865-08	8"	2 1/2"	19"	80 lbs.	\$ 724.50
9-12865-12	12"	2 1/2"	23"	89 lbs.	\$ 696.60
9-12865-16	16"	2 1/2"	27"	100 lbs.	\$ 762.10
9-12865-20	20"	2 1/2"	31"	112 lbs.	\$ 837.00
9-12865-24	24"	2 1/2"	35"	120 lbs.	\$ 946.50
9-12865-30	30"	2 1/2"	41"	135 lbs.	\$ 957.15
9-12865-36	36"	2 1/2"	47"	196 lbs.	\$1022.65
9-12865-48	48"	2 1/2"	61"	234 lbs.	\$1267.65
9-12865-54	54"	2 1/2"	68"	251 lbs.	\$1294.50
9-12865-60	60"	2 1/2"	75"	270 lbs.	\$1439.10

**SPECIFICATIONS:** Ports SAE 12, 1 1/2" dia. pins.


ITEM	Stroke	Rod Retracted		Shpg.	Price
		Dia.	Lgth.		
9-12866-08	8"	3"	19"	112 lbs.	\$ 870.00
9-12866-12	12"	3"	23"	121 lbs.	\$ 966.00
9-12866-16	16"	3"	27"	133 lbs.	\$ 947.05
9-12866-24	24"	3"	35"	205 lbs.	\$1097.55
9-12866-30	30"	3"	41"	225 lbs.	\$1215.00
9-12866-36	36"	3"	47"	245 lbs.	\$1331.80
9-12866-48	48"	3"	61"	292 lbs.	\$1595.15
9-12866-54	54"	3"	68"	319 lbs.	\$1940.40
9-12866-60	60"	3"	75"	346 lbs.	\$1827.00

### 8" Bore Prince Standard Duty Welded Cylinders

• Brand new PRINCE 3000 PSI standard duty double acting cylinders. Features include welded construction, fully chromed piston rod, ductile iron piston and thread-in gland and crosstube ends on both ends with grease zerks.

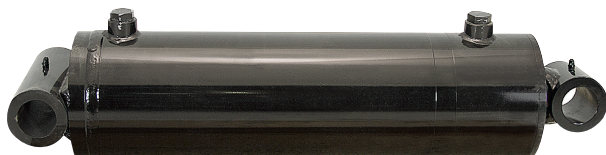

### Top Link Cylinders Control with Tractor Remote



• Brand new, AMA category 1 top link cylinder. Use in place of top link on three point hitches for adjusting implement. Built-in lock valve to prevent cylinder drift. Ships with two 3/8" BSPPM to 3/8" NPTM connectors.

#### ITEM 9-7682-08

##### SPECIFICATIONS

- Double acting
- Bore x Stroke 2" x 8 1/4"
- Pressure 3000
- Rod dia. 1 1/16"
- Ports 3/8" BSPPP
- Retracted lgth. 18 1/8"
- Swivel eye ends 1 3/4" w.
- Pin holes 3/4"
- Shpg. 18 lbs.

**\$219.85**

#### ITEM 9-7682-11

##### SPECIFICATIONS

- Double acting
- Bore x Stroke 2" x 11"
- Pressure 3000
- Rod dia. 1 1/16"
- Ports 3/8" BSPPP
- Retracted lgth. 20 7/8"
- Swivel eye ends 1 3/4" w.
- Pin holes 3/4"
- Shpg. 20 lbs.

**\$230.55**

### 3" x 8" x 1 1/2" Top Link Cylinder



#### ITEM 9-5196

• Brand new. Use on tractors in place of top link on three point hitches to adjust implement. Double swivel adapter on base of cylinder to provide vertical and horizontal movement of hitch.

##### SPECIFICATIONS

- Double acting
- Bore/stroke 3" x 8"
- 3000 PSI
- Rod diam. 1 1/2"
- Ports 1/2" NPT
- Retracted lgth. 22"
- Pin holes 1"
- Shpg. 29 lbs.
- Single eye rod w/self aligning width 1 3/4"
- Double swivel base assembly - width 2"

**\$358.95**

### 3" x 8" x 1 1/2" Top Link Cylinder



#### ITEM 9-5152

• Brand new. Self aligning swivel eye at each end.

##### SPECIFICATIONS

- Double acting
- Bore/stroke 3" x 8"
- 3000 PSI
- Rod diam. 1 1/2"
- Ports 1/2" NPT
- Retracted lgth. 19 1/2"
- Swivel eye ends 1 3/4" w.
- Pin holes 1"
- Shpg. 27 lbs.

**\$335.25**

**SPECIFICATIONS:** Ports SAE 16, 2 1/2" dia. pins.

ITEM	Stroke	Rod Retracted		Shpg.	Price
		Dia.	Lgth.		
9-8423-8	8"	4"	24"	250 lbs.	\$2783.20
9-8423-12	12"	4"	28"	275 lbs.	\$2982.00
9-8423-16	16"	4"	32"	300 lbs.	\$3003.00
9-8423-20	20"	4"	36"	325 lbs.	\$3518.20
9-8423-24	24"	4"	40"	350 lbs.	\$3668.00
9-8423-30	30"	4"	46"	385 lbs.	\$3942.40
9-8423-36	36"	4"	52"	425 lbs.	\$3816.40
9-8423-48	48"	4"	66"	500 lbs.	\$4313.40
9-8423-54	54"	4"	73"	540 lbs.	\$4548.60
9-8423-60	60"	4"	80"	580 lbs.	\$5429.20