

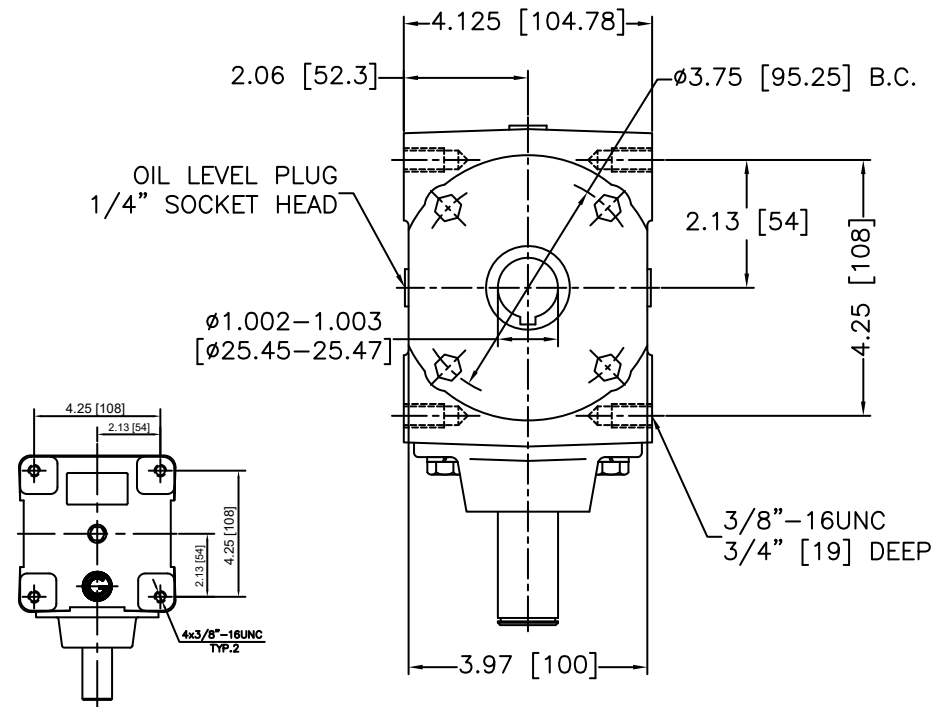


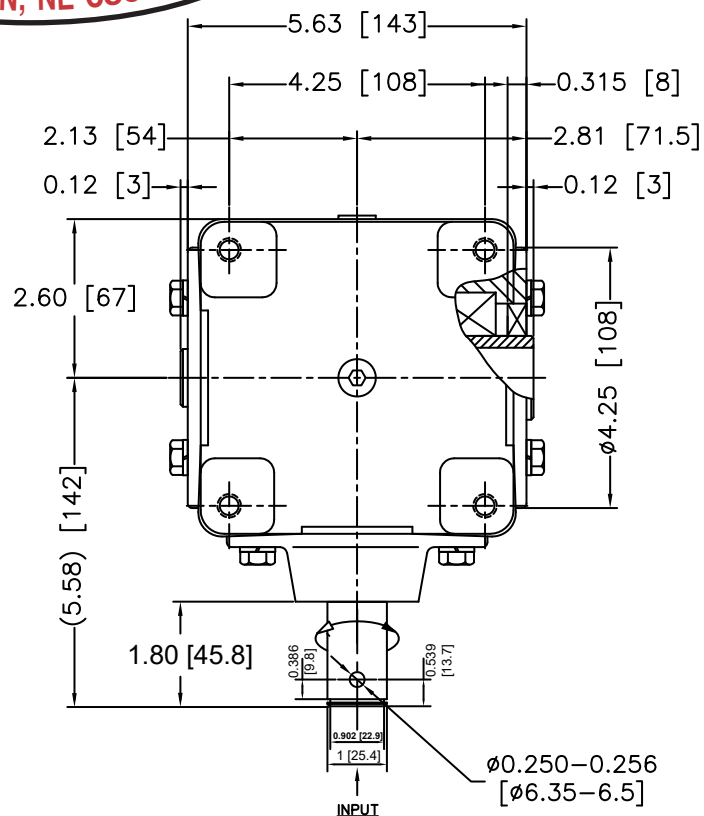

inches [mm]

MOUNTING ORIENTATION AS ILLUSTRATED

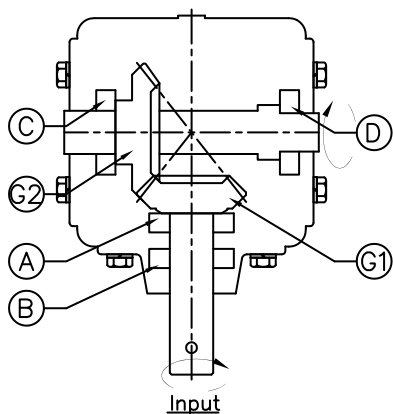

GEAR DATA			SHAFT DATA				
GEAR TYPE:	Straight Bevel		INPUT SHAFT:	1" w/ 1/4" Pin Hole			
GEAR MATERIAL:	20 CrMnTi		OUTPUT SHAFT:	1" w/ 1/4" Key Internal			
DIAMETRIAL PITCH:	12		SHAFT MATERIAL:	45			
RATIO:	3:1		BEARINGS				
GEAR POSITION:	G1	G2	POSTION:	A	B	C	D
NUMBER OF TEETH:	13	39	NUMBER:	L44610/L44643	L44610/L44643	LM29710/LM29749	LM29710/LM29749
RATINGS		Peak					
INPUT SPEED:	2000 rpm						
INPUT POWER:	32 hp		SEALS:	NITRILE			
OUTPUT TORQUE:	950 lb. in.			DOUBLE LIP			
RECOMMENDED LUBRICANT: EP 85W-140							