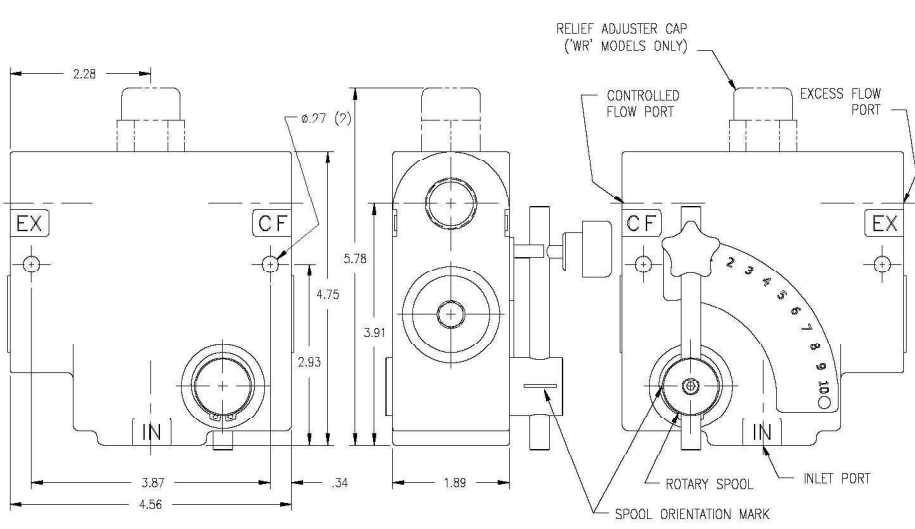


Item Number: 906938

MODEL No.	DESCRIPTION	CROSS REF.	WEIGHT (POUNDS)
WR-1937-8T	3/8-NPTF PORTS (0-8 GPM CF SPOOL)	FCR51-3/8	9
RELIEF PRESSURE INFORMATION: Inlet relief protection available on "WR" models. Relief pressure preset at 1500 PSI and is adjustable from 1250 to 3000 PSI. To adjust, remove acorn nut, turn adjusting screw clockwise to increase pressure, counterclockwise to reduce pressure. Reinstall acorn nut after adjusting. Use a pressure gauge when making adjustments.			
 <p>Technical drawing of the valve assembly showing front and side views with dimensions and labels. Labels include: EX, CF, IN, RELIEF ADJUSTER CAP ("WR" MODELS ONLY), CONTROLLED FLOW PORT, EXCESS FLOW PORT, ROTARY SPOOL, SPOOL ORIENTATION MARK, and INLET PORT. Dimensions include: 2.28, 0.97 (2), 5.78, 4.75, 3.91, 2.93, 3.87, 4.56, .34, 1.89, 2, 3, 4, 5, 6, 7, 8, 9, 10.</p> <p>NOTE: ALL DIMENSIONS ARE FOR REFERENCE ONLY.</p>			VALVE SPECIFICATIONS <ul style="list-style-type: none">• 8 GPM max flow• 3000 PSI max• 180° F max temp• Filtration 17/14/19• For use with mineral based hydraulic fluid• Side port configuration• 100% Tested• External seals on rotary spool prevent contamination from locking up spool