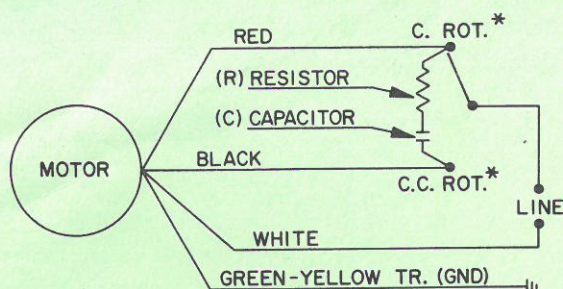


**CONNECTION DIAGRAM  
HY-SYNC® MOTOR/GEARMOTOR  
(3 WIRE REVERSIBLE)**

\* WHEN FACING MOUNTING FLANGE END OF MOTOR

GROUND WIRE (±) OMITTED  
BY CUSTOMER REQUEST ONLY

**NOTES:**

(R) AND (C) VALUES: REFER TO MOTOR NAMEPLATE.

(R) WATTAGE AND (C) VOLTAGE RATINGS: REFER TO  
CATALOG HY IF STANDARD MOTORS OR

(R) WATTAGE  $\geq I^2$  MOTOR RATED X (R)

(C) VOLTAGE = 250 VAC (MOTOR RATED VOLTAGE  $\leq$  120 V)  
= 500 VAC (MOTOR RATED VOLTAGE  $>$  120 V).

074 10088