


Hydraulic Schematic



CONTINUOUS DUTY OPERATING RANGE

Minimum Voltage at the Coil Required for Pull-In
 32 cSt/150 sus oil at 40°C (104°F)

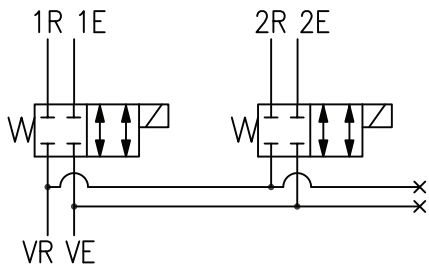