
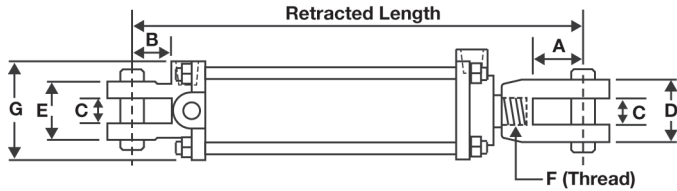


• Brand new, LYNX LH3000 by Lion Hydraulics. Superior quality double acting tie-rod cylinders built for years of service in demanding applications. 3000 PSI.

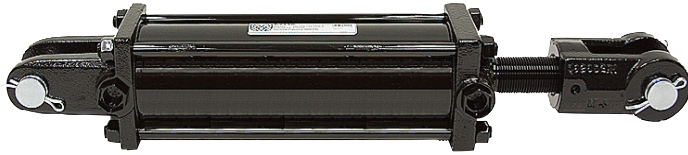

Dimensional Data for Lion TH Cylinders

| Bore | Throat Depth | | | Thread | | | |
|--------|--------------|---------|-----------|--------|---------|---------------|--------|
| | A | B | C | D | E | F | G |
| 2" | 2 1/8" | 2 1/16" | 1 1/8" | 2 1/2" | 2 3/8" | 1 1/8"-12 UNF | 2 3/4" |
| 2 1/2" | 2 1/8" | 2 1/16" | 1 1/8" | 2 1/2" | 2 1/2" | 1 1/8"-12 UNF | 3 1/8" |
| 3" | 2 1/8" | 2 1/16" | 1 1/8" | 2 5/8" | 2 5/8" | 1 1/4"-12 UNF | 3 3/4" |
| 3 1/2" | 2 1/8" | 2 1/16" | 1 1/8" | 2 5/8" | 2 9/16" | 1 1/4"-12 UNF | 4 1/2" |
| 4" | 2 1/8" | 2 1/16" | 1 1/8" | 2 5/8" | 2 5/8" | 1 1/4"-12 UNF | 5 1/8" |
| 5" | 2 1/8" | 2 1/4" | 1 3/16" * | 3" | 3 1/2" | 1 1/2"-12 | 6" |

* Base end measure 1 5/16"

Grapple Cylinders



• Ideal size for use as a grapple cylinder and other implement attachments. Item 9-12380 has 3/8" threaded studs welded to top of each port for hoseguard

ITEM 9-12380

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2" x 10"
- Pressure 3000 PSI
- Cross-Tube Ends
- O.D. 2"

\$59.95

- Width 3"
- Pin Hole 1 1/4"
- Rod Dia. 1.25"
- Ports 3/8" NPT
- Retracted Length 17"
- Shpg. 18 lbs.

ITEM 9-12381

SPECIFICATIONS

- New, Double Acting
- Bore x Stroke 2" x 10"
- Pressure 3000 PSI
- Cross-Tube Ends
- O.D. 1.5"

\$59.95

- Width 2.625"
- Pin Hole 1"
- Rod Dia. 1.25"
- Ports SAE 6
- Retracted Length 16.5"
- Shpg. 16 lbs.

Top Link Cylinders Control with Tractor Remote



• Brand new, AMA category 1 top link cylinder. Use in place of top link on three point hitches for adjusting implement. Built-in lock valve to prevent cylinder drift. Ships with two 3/8" BSPPM to 3/8" NPTM connectors.

ITEM 9-7682-08

SPECIFICATIONS

- Double acting
- Bore x Stroke 2" x 8 1/4"
- Pressure 3000

- Rod dia. 1 1/16"
- Ports 3/8" BSPPP
- Retracted lgth. 18 1/8"

- Swivel eye ends 1 3/4" w.
- Pin holes 3/4"
- Shpg. 18 lbs.

\$189.95

ITEM 9-7682-11

SPECIFICATIONS

- Double acting
- Bore x Stroke 2" x 11"
- Pressure 3000

- Rod dia. 1 1/16"
- Ports 3/8" BSPPP
- Retracted lgth. 20 7/8"

- Swivel eye ends 1 3/4" w.
- Pin holes 3/4"
- Shpg. 20 lbs.

\$203.95

3" x 8" x 1 1/2" Top Link Cylinder

ITEM 9-5196

\$259.95



• Brand new. Use on tractors in place of top link on three point hitches to adjust implement. Double swivel adapter on base of cylinder to provide vertical and horizontal movement of hitch.

SPECIFICATIONS

- Double acting
- Bore/stroke 3" x 8"
- 3000 PSI
- Rod diam. 1 1/2"

- Ports 1/2" NPT
- Retracted lgth. 22"
- Pin holes 1"
- Shpg. 29 lbs.

- Single eye rod w/self aligning width 1 3/4"
- Double swivel base assembly - width 2"

3" x 8" x 1 1/2" Top Link Cylinder

ITEM 9-5152

\$246.00



• Brand new. Self aligning swivel eye at each end.

SPECIFICATIONS

- Double acting
- Bore/stroke 3" x 8"
- 3000 PSI

- Rod diam. 1 1/2"
- Ports 1/2" NPT
- Retracted lgth. 19 1/2"

- Swivel eye ends 1 3/4" w.
- Pin holes 1"
- Shpg. 27 lbs.

| ITEM | Stroke | Rod | | Shpg. | Price |
|---------------|--------|----------------|-----------------|----------|----------|
| | | Retracted Dia. | Retracted Lgth. | | |
| 9-8264-06 | 6" | 1 1/2" | 16 1/4" | 39 lbs. | \$165.55 |
| 9-8264-08-S | 8" | 1 1/2" | 18 1/4" | 42 lbs. | \$171.45 |
| 9-8264-08 | 8" | 1 1/2" | 20 1/4" | 43 lbs. | \$157.15 |
| 9-8264-10 | 10" | 1 1/2" | 20 1/4" | 46 lbs. | \$177.30 |
| 9-8264-12 | 12" | 1 1/2" | 22 1/4" | 49 lbs. | \$186.25 |
| 9-8264-14 | 14" | 1 1/2" | 24 1/4" | 53 lbs. | \$199.50 |
| 9-8264-16-S | 16" | 1 3/4" | 26 1/4" | 59 lbs. | \$213.45 |
| 9-8264-16 * | 16" | 1 3/4" | 31 1/2" | 61 lbs. | \$239.50 |
| 9-8264-18 | 18" | 1 3/4" | 28 1/4" | 62 lbs. | \$232.35 |
| 9-8264-20 | 20" | 1 3/4" | 30 1/4" | 66 lbs. | \$239.85 |
| 9-8264-24-150 | 24" | 1 1/2" | 34 1/4" | 69 lbs. | \$242.70 |
| 9-8264-24-175 | 24" | 1 3/4" | 34 1/4" | 74 lbs. | \$263.40 |
| 9-8264-24-200 | 24" | 2" | 34 1/4" | 79 lbs. | \$280.80 |
| 9-8264-30 | 30" | 2" | 40 1/4" | 91 lbs. | \$315.70 |
| 9-8264-36 | 36" | 2" | 46 1/4" | 104 lbs. | \$360.40 |
| 9-8264-48 | 48" | 2" | 58 1/4" | 128 lbs. | \$443.05 |

* 1 1/4" pins

| ITEM | Stroke | Rod | | Shpg. | Price |
|-------------|--------|----------------|-----------------|----------|----------|
| | | Retracted Dia. | Retracted Lgth. | | |
| 9-8265-08 | 8" | 2" | 20 1/4" | 76 lbs. | \$292.90 |
| 9-8265-10 | 10" | 2" | 22 1/4" | 80 lbs. | \$306.45 |
| 9-8265-12 | 12" | 2" | 24 1/4" | 81 lbs. | \$329.95 |
| 9-8265-14 | 14" | 2" | 26 1/4" | 90 lbs. | \$352.65 |
| 9-8265-16-S | 16" | 2" | 28 1/4" | 95 lbs. | \$374.85 |
| 9-8265-16 | 16" | 2" | 31 1/2" | 99 lbs. | \$388.05 |
| 9-8265-18 | 18" | 2" | 30 1/4" | 100 lbs. | \$398.40 |
| 9-8265-20 | 20" | 2" | 32 1/4" | 105 lbs. | \$424.20 |
| 9-8265-24 | 24" | 2" | 36 1/4" | 115 lbs. | \$453.85 |
| 9-8265-30 | 30" | 2" | 42 1/4" | 130 lbs. | \$495.45 |
| 9-8265-36 | 36" | 2" | 48 1/4" | 145 lbs. | \$546.75 |
| 9-8265-48 * | 48" | 2" | 58 1/4" | 175 lbs. | \$658.00 |

* 1 1/4" pins