




Prince "Royal" Line Cylinders

Brand new, double acting welded cylinders made by PRINCE MFG. 2500 PSI working pressure. Fully chromed piston rod.



Dimensional Data for Prince "Royal" Cylinders

Bore	A	B	C	Crosstube Width	
				L1	L2
2 1/2"	2 9/16"	9/16"	3/4"	3"	1 3/8"
3"	2 5/16"	1 1/16"	1"	3 1/2"	1 1/2"
3 1/2"	1 11/16"	1 1/16"	1"	4"	1 1/2"
4"	2 1/8"	1 5/16"	1 1/8"	4 1/2"	2"

2 1/2" BORE

SPECIFICATIONS: Ports 3/8" NPT, 3/4" dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
9-1672-08	8"	1 3/8"	16"	20 lbs.	\$223.15
9-1672-12	12"	1 3/8"	20"	23 lbs.	\$230.95
9-1672-16	16"	1 3/8"	24"	27 lbs.	\$241.50
9-1672-20	20"	1 3/8"	28"	30 lbs.	\$246.85
9-1672-24	24"	1 3/8"	32"	35 lbs.	\$259.15
9-1672-30	30"	1 3/8"	38"	40 lbs.	\$283.15
9-1672-32	32"	1 3/8"	40"	42 lbs.	\$287.40
9-1672-36	36"	1 3/8"	44"	45 lbs.	\$292.80
9-1672-42	42"	1 3/8"	50"	52 lbs.	\$311.50

3 1/2" BORE

SPECIFICATIONS: Ports 1/2" NPT, 1" dia. pins.

ITEM	Stroke	Rod Retracted		Shpg.	Price
		Dia.	Lgth.		
9-062-08	8"	1 1/2"	16"	30 lbs.	\$285.40
9-062-12	12"	1 1/2"	20"	34 lbs.	\$298.50
9-062-16	16"	1 1/2"	24"	40 lbs.	\$316.00
9-062-20	20"	1 1/2"	28"	43 lbs.	\$329.95
9-062-24	24"	1 1/2"	32"	47 lbs.	\$338.00
9-062-30	30"	1 1/2"	38"	51 lbs.	\$366.55
9-062-32	32"	1 1/2"	40"	57 lbs.	\$375.90
9-062-36	36"	1 1/2"	44"	62 lbs.	\$394.75
9-062-40	40"	1 1/2"	48"	66 lbs.	\$413.65
9-062-42	42"	1 1/2"	50"	69 lbs.	\$433.90
9-062-48	48"	1 1/2"	56"	75 lbs.	\$512.25

3" BORE

SPECIFICATIONS: Ports 1/2" NPT, 1" dia. pins.

ITEM	Stroke	Rod Dia.	Retracted Lgth.	Shpg.	Price
9-1650-08	8"	1 1/2"	16"	25 lbs.	\$264.75
9-1650-12	12"	1 1/2"	20"	30 lbs.	\$276.50
9-1650-16	16"	1 1/2"	24"	33 lbs.	\$281.30
9-1650-20	20"	1 1/2"	28"	37 lbs.	\$289.25
9-1650-24	24"	1 1/2"	32"	41 lbs.	\$300.20
9-1650-30	30"	1 1/2"	38"	47 lbs.	\$322.10
9-1650-32	32"	1 1/2"	40"	50 lbs.	\$328.80
9-1650-36	36"	1 1/2"	44"	53 lbs.	\$346.70
9-1650-40	40"	1 1/2"	48"	59 lbs.	\$355.65
9-1650-42	42"	1 1/2"	50"	61 lbs.	\$364.45
9-1650-48	48"	1 1/2"	56"	69 lbs.	\$405.75

4" BORE

SPECIFICATIONS: Ports 1/2" NPT, 1 1/4" dia. pins.

ITEM	Stroke	Rod Retracted		Shpg.	Price
		Dia.	Lgth.		
9-030-08	8"	2"	17"	43 lbs.	\$378.50
9-030-12	12"	2"	21"	49 lbs.	\$392.80
9-030-16	16"	2"	25"	56 lbs.	\$409.15
9-030-20	20"	2"	29"	62 lbs.	\$423.90
9-030-24	24"	2"	33"	69 lbs.	\$448.45
9-030-30	30"	2"	39"	81 lbs.	\$457.30
9-030-32	32"	2"	41"	82 lbs.	\$471.30
9-030-36	36"	2"	45"	91 lbs.	\$503.00
9-030-40	40"	2"	49"	95 lbs.	\$520.35
9-030-42	42"	2"	51"	99 lbs.	\$529.45
9-030-48	48"	2"	57"	106 lbs.	\$578.80
9-030-60	60"	2"	69"	127 lbs.	\$648.00

Cylinder Definitions


Bore - Inside diameter of cylinder

Stroke - How far a cylinder extends out

R-length - Distance in inches between pin centers when cylinder is retracted

Rod Diameter - Diameter of cylinder rod

Single Acting - Cylinder is powered one way

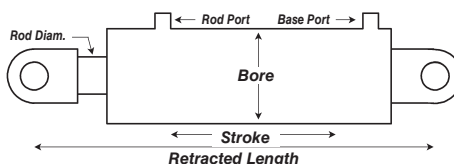

Double Acting - Cylinder is powered both ways (two way)

Crosstube End - Round tube welded perpendicular to cylinder

Single Eye End - For mounting between two mounting ears.

Clevis End - Two mounting ears