

Water System Automatic Pressure Switches

• Brand new, LEFOO automatic pressure switch for automatic water systems. Automatically turns pump ON or OFF at set values. Adjustable differential. Sturdy plastic housing. Single port.

ITEM 4-1822

\$13.95

SPECIFICATIONS

- Contact ratings
1 1/2 HP at 120 VAC
2 HP at 230 VAC
3 HP at 240 VAC 3Ph
- Factory setting
ON (cut-in) 40 PSI
OFF (cut-out) 60 PSI
- Min. ON (cut-in) 20 PSI
- Max. OFF (cut-out) 80 PSI
- Differential 15-35 PSI
- Port 1/4" NPT
- Size 3 3/4" x 2 5/8" x 3 3/4"
- Shpg. 1 1/2 lbs.



ITEM 4-1821

\$13.95

SPECIFICATIONS

- Contact ratings
1 1/2 HP, 20 amps at 120 VAC
2 HP, 12 amps at 240 VAC
3 HP, 9.6 amps at 240 VAC 3Ph
- Factory setting
ON (cut-in) 30 PSI, OFF (cut-out) 50 PSI
- Min. ON (cut-in) 30 PSI
- Max. OFF (cut-out) 100 PSI
- Differential 20-35 PSI
- Port 1/4" NPT
- Size 3 1/2" x 2 1/4" x 3 1/8"
- Shpg. 1 1/2 lbs.



12 VDC Marine Camper Pump

ITEM 2-924
\$31.70

• Brand new. For boats, camper-trailers, etc. as bilge or water system pump. Non-corrosive. Use in any position provided intake is submerged. Fits into tight, out-of-way places.

SPECIFICATIONS

- 12 VDC at 1.8 full load amp
- 339 GPH at 1 ft.
- 95 GPH at 10 ft.
- IN 1/2" NPT
- OUT 3/8" NPT
- Size 5 1/2" x 2" x 2"
- Shpg. 2 lbs.



115 VAC Coolant Recirculating Pump

ITEM 2-1436
\$27.95

• New, BECKETT Model BJ5A coolant recirculating pedestal pump. Ideal replacement or use with evaporative coolers, displays, laboratories and other water transfer applications. Features include polystyrene column and cap, ABS base plate and a 1/2" OD PVC adapter. ODP motor with fan and cover.

SPECIFICATIONS

- Voltage 115 VAC
- Amperage 0.9 Amps
- Power 1/70 HP
- Flow Rates
340 GPH at 1 ft. head
255 GPH at 4 ft. head
200 GPH at 6 ft. head
130 GPH at 8 ft. head
40 GPH at 10 ft. head
- Speed 3000 RPM
- Max. head 88 ft. (38 PSI)
- Shut-off at 10.1 ft. head
- Duty continuous
- Power cord 3 foot 18/3
- Inlet base
- Discharge 1/2" hose barb w/adaptor
- Size 4 1/2" dia. x 9" high
- Shpg. 5 lbs.



Polypropylene Chemical Pump

ITEM 2-1451
\$36.95

• New, Funnel King Fluid Control Products by WirthCo plunger style hand pump. Use to transfer antifreeze, detergent, windshield fluid. Polypropylene with steel rod and Viton seals. Includes 2" bung adapter and angled discharge spout.

SPECIFICATIONS

- Flow Rate 1 gal. @ 10 full strokes
- Rotation CW
- Mount 2" Tank Bung
- Suction Pipe Length 38"
- Shpg. 3 lbs.

Nylon Chemical Pump

ITEM 2-1452
\$36.95

• New, Funnel King Fluid Control Products by WirthCo plunger style hand pump. Use to transfer DEF, acetone, antifreeze, detergent mild acid. Nylon with stainless steel rod and PTFE seals. Includes 2" bung adapter and angled discharge spout.

SPECIFICATIONS

- Flow Rate 1 gal. @ 10 full strokes
- Rotation CW
- Mount 2" Tank Bung
- Suction Pipe Length 38"
- Shpg. 4 lbs.

Bilge or Drum Pump

ITEM 2-1454
\$39.95

• New, Funnel King Fluid Control Products by WirthCo diaphragm hand pump. Use as a bilge pump or convert to drum pump. Will handle water, saltwater, diesel, kerosene, gasoline, antifreeze, light oils. Can be mounted and operated in any position. Swap hoses to reverse fluid flow. Polyacetal body, polyurethane diaphragm with stainless steel hardware. Includes suction strainer and discharge nozzle.

SPECIFICATIONS

- Flow Rate 4.4 gal. per minute
- Drum Adapter 2" Tank Bung
- Hose size 1" ID
- Shpg. 8 lbs.

Windshield Washer Pump

ITEM 2-1442
\$8.99

• New, windshield washer pump. Mounts thru grommet on side of reservoir (not included). Recessed two prong electrical connection.

SPECIFICATIONS

- Pump Voltage 12 VDC
- Mount 0.65 OD barb for grommet
- Outlet 3/16" hose barb
- Size 1 3/8" dia. x 3 3/4"
- Shpg. 1 lb.

Barrel Drain Petcock

ITEM 20-973
\$1.99

- 1" NPT male. Size 2 3/4" x 2 1/2" x 1 1/2". Shpg. 1 lb.




Lever Operated Bucket Pump

ITEM 2-1470
\$19.99

• New BEL-RAY model SV00044 lever operated pump. 3 thumbscrews hold top to 5 gallon lubricant pails.

SPECIFICATIONS

- Volume per stroke 2.9 ounces
- Cover Dia. 12"
- Outlet 1/4" NPT
- Discharge Tube 48" with 3/8-16 threaded end
- Handle 12"
- Size 12" dia. x 21"
- Shpg. 7 lbs.

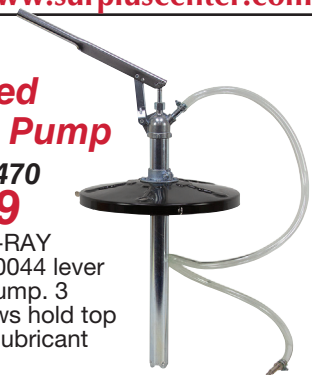


Lever Operated Barrel Pump

ITEM 2-1471
\$16.99

• New BEL-RAY model SV00045 lever operated pump. Telescoping suction tube for 16 to 55 gallon barrels. Pump has garden hose thread to spout. Two brass rings inside pump for use with non-corrosive liquids.

SPECIFICATIONS

- Volume per stroke 8.5 ounces
- Bung Dia. 2"
- Spout ID 5/8"
- Suction Tube 17"-34"
- Handle 12" with vinyl cushion grip
- Body Size 2 1/8" dia. x 10"
- Shpg. 3 lbs.

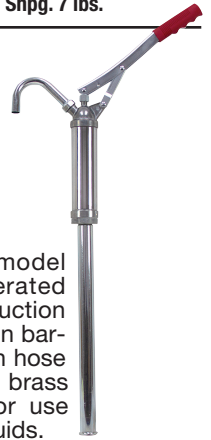

14 Ounce Grease Gun

ITEM 2-1469
\$14.99

• New, BEL-RAY 14 ounce grease gun. Will work with either 14 ounce cartridges or can be suction loaded. Output tube can be moved to inline mounting. Plated finish.

SPECIFICATIONS

- Model SV00051
- Volume 1 ounce per stroke
- Max Pressure 4500 PSI
- Size 14" x 8" x 2 1/4"
- Shpg. 3.5 lbs.



3 Ounce Grease Gun

ITEM 2-1472
\$7.99

• New, BEL-RAY compact 3 ounce grease gun. Will work with either 3 ounce cartridges or can be suction loaded. Includes 5" extension and 9" flex hose. Output tube can be moved to inline mounting. Plated finish.

SPECIFICATIONS

- Model SV00050
- Volume 1/2 ounce per stroke
- Max Pressure 2900 PSI
- Size 10" x 4 1/2" x 1 1/2"
- Shpg. 2 lbs.

