



10 Gallon Portable Tire Blaster
\$180.00

ITEM 1-5014

• Brand new EAGLE Model IHCT10 portable tire blaster. Uses a blast of air to seat tire beads onto rims. 2" NPT ball valve and special adapter nozzle to control air flow into tire. Features include heavy gauge steel construction, shut-off valve, filling valve, pressure gauge, 3 foot hose, tire chuck and built-in cushioned carry handle. Quick coupler end for attachment to compressor airline for filling.

SPECIFICATIONS

- Tank capacity 10 gallon
- Pressure 150 PSI max.
- Size 35" x 12 1/4" x 15.8"
- Shpg. 39 lbs.

In-tank Check Valves

• Brand new brass construction air check valve. Threads directly into tank port. Allow one way airflow from compressor to tank while preventing air from leaking backward from tank thru compressor. Auxillary port for connection to unloader valve on pressure

SPECIFICATIONS FOR ALL

- 450 PSI max.
- Cracking pressure 4 PSI
- Unloader port 1/8" NPT
- Temp. 400° F

ITEM	Tank Port	Inlet Port	Size	Shpg.	Price
4-1925-50	1/2" NPT	1/2" NPT	1" hex x 2 13/16"	1 lb.	\$9.00
4-1925-75	3/4" NPT	3/4" NPT	1 3/16" hex x 3 15/16"	1 lb.	\$10.50
4-1925-100	1" NPT	1" NPT	1 1/2" hex x 3 15/16"	1 1/2 lbs.	\$20.25
4-1926	1/2" NPT	1/2" male flare	1" hex x 2 13/16"	1 lb.	\$7.50



Air Control Valves

4-1542 & 4-1544



4-1543

• Brand new AIR-MITE. Use for operating single or double acting air cylinders. Anodized aluminum body. Ports 1/4" NPT. Rated 150 PSI. Shpg. 2 lbs.

ITEM 4-1542 \$96.00

• Model V-4203. Two position, lever operated. Manual return. Size 5 1/2" x 2" x 1 3/8".

ITEM 4-1544 \$129.00

• Model V-4204-3P. Three position, lever operated. Spring return to center. Size 5 1/2" x 2" x 1 3/8".

ITEM 4-1543 \$99.00

• Model V-4208. Two position, foot pedal. Spring return. Size 7" x 2 3/8" x 1 5/8".



Air Control Valve

ITEM 4-1668 \$126.00

• Brand new AIR-MITE Model V-4210-3P. Use for operating single or double acting air cylinders. Anodized aluminum body. All ports blocked in spring centered position.

SPECIFICATIONS

- Treadle style foot pedal
- Ports 1/4" NPT
- Spring centered
- PSI 150
- Size 7" x 2 3/8" x 1 5/8"
- Three position
- Shpg. 2 lbs.

Mini Air Regulator w/Gauge

ITEM 4-1780

\$5.95

• New, Campbell Hausfeld #RE206901AV. Inline air pressure regulator w/gauge.

SPECIFICATIONS

- Inlet 200 PSI max.
- Gauge port 1/8" NPT
- Outlet range 135 PSI
- Size 3 5/8" x 1 1/2" x 2 3/4"
- Ports 1/4" NPT
- Shpg. 1/2 lb.



115 VAC Vacuum Pump

ITEM 4-1961 \$44.95

• New, NITTO-KOHKI compact linear motor driven free piston vacuum pump. Model VP0450. Oil-less for clean air, self-cooling long life. Low power and noise. Aluminum construction with rubber vibration isolation mounting feet.

SPECIFICATIONS

- Voltage 115 AC
- Power Consumption 34 watts
- Air Flow 18 lpm (0.64 CFM) open flow
- Vacuum 19.68 inHg max.
- Noise Level 55 db
- Ports 1/4" NPT
- Duty Continuous
- Size 5 5/8" x 4" x 5"
- Shpg. 6 lbs.



Compressor Unloader Valve

ITEM 4-1499

\$39.95

• Brand new. Use on compressors driven by continuous power input (gas engines, hydraulic, etc.). Once tank reaches full pressure incoming air from compressor is vented to atmosphere. 1/4" NPT tank connection, 1/4" tubing connection for air line, 1/8" NPT for idle control or head unloader. Toggle lever to override. Size 3" x 3 1/2" x 1 1/2". Shpg. 1 lb.



1/4" NPT Air Safety Valve

• Brand new, CONRADER SRV-187 brass air compressor safety relief valve. Factory set, non-adjustable. Pull ring allows manual pressure relief.

SPECIFICATIONS FOR ALL

- Connection 1/4" NPT
- Size 9/16" dia. x 1 1/2"
- Shpg. 1/4 lb.



ITEM	Relief Setting	Air Flow	Price
4-1927-125	125 PSI	62 CFM	\$3.40
4-1927-150	150 PSI	73 CFM	\$3.40
4-1927-170	170 PSI	82 CFM	\$3.40
4-1927-200	200 PSI	96 CFM	\$3.40


115 Volt AC Air Pump

ITEM 4-1951 \$39.95

• New, HAILEA model ACO-009E air pump. Use for large or multiple aquariums. Finned aluminum housing. Linear piston design for long life, low noise and vibration. Oilfree air.

SPECIFICATIONS

- Voltage 115 AC
- Power Consumption 160 watts
- Flow 5 CFM (145 Liters/Min.) free flow
- Pressure 5 PSI (0.035 Mpa)
- Noise Level <60 db
- Duty Continuous
- Inlet Port 0.571 OD barb for 13mm tubing
- Outlet Port M12x1.5 metric pipe
- Inlet Port 0.466 OD barb for 10mm tubing
- Mount Rubber cushion feet
- Size 11 1/4" 5" x 6 5/8"
- Shpg. 13 lbs.

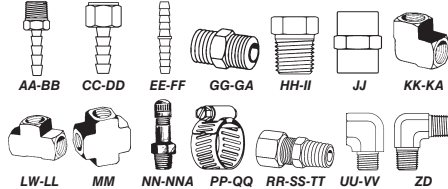

• Brand new. Brass (except clamps). Give full description on order (1/4" Tee = 455-LL). Shpg. 1/4 lb. ea.

ITEM 455- Air Fittings

- (AA) Male hose end, 1/4" hose x 1/4" NPT..... \$1.40
- (BB) Male hose end, 3/8" hose x 1/4" NPT..... \$1.30
- (CC) Female NPT, 1/4" hose x 1/4" NPT..... \$2.90
- (DD) Female NPT, 3/8" hose x 1/4" NPT..... \$4.80
- (EE) Hose mender, 1/4" hose x 1/4" hose..... \$1.40
- (FF) Hose mender, 3/8" hose x 3/8" hose..... \$1.35
- (GA) Reducer, 1/4" NPT x 1/8" NPT..... \$1.65
- (GG) Hex nipple, 1/4" x 1/4" NPT..... \$1.20
- (HH) Bushing, 1/8" female x 1/4" male NPT..... \$0.70
- (II) Bushing, 1/4" female x 3/8" male NPT..... \$1.20
- (JJ) Coupling, 1/4" x 1/4" female NPT..... \$2.80
- (KA) 90° elbow, 1/8" NPT..... \$1.75
- (KK) 90° elbow, 1/4" NPT..... \$4.50
- (LL) Tee, 1/4" NPT..... \$4.80
- (LM) Tee, 1/8" NPT..... \$3.25
- (MM) Cross, 1/4" NPT..... \$7.70
- (NN) Filling valve, 1/8" NPT..... \$1.45
- (NNA) Filling valve, 1/4" NPT..... \$2.15
- (PP) Clamp, for standard 1/4" ID hose..... \$0.60
- (QQ) Clamp, for standard 3/8" ID hose..... \$0.60
- (RR) Compression Coupling 1/4" NPT x 1/4" cu. tubing..... \$1.55
- (SS) Compression coupling 1/4" NPT x 3/16" cu. tubing..... \$2.20
- (TT) Compression coupling 1/4" NPT x 3/8" cu. tubing..... \$1.85
- (UU) 1/8" Street Elbow..... \$2.15
- (VV) 1/4" Street Elbow..... \$3.75
- (AAA) Male hose end, 1/8" hose x 1/8" NPT..... \$1.00
- (BBB) Female solid NPT, 1/4" hose x 1/4" NPT... \$1.75
- (CCC) Female solid NPT, 3/8" hose x 1/4" NPT.... \$2.05
- (FFF) Male hose end, 0.17" hose x 1/4" NPT.... \$3.15
- (GGG) 45° elbow Male hose end, 3/8" hose x 3/8" NPT..... \$5.85

Quick Change Air Hose Couplers

• Brand new. Install at one end of hoses to air equipment.
• Compressor need not be shut off. Swivel action helps prevent hose kinking. Change from one air tool to another in seconds.

Complete Unit

ITEM 438

\$6.65

• Complete unit (coupler and adapter). Couplers 1/4" female NPT. Adapter 1/4" male NPT. Complete unit 3/4" x 2 1/2". Shpg. 1 lb.

Male Adapter Only

ITEM 439

\$1.00

• 1/4" male NPT adapter only. Shpg. 1/4 lb.

Female Adapter Only

ITEM 440

\$1.05

• 1/4" female NPT adapter only. Shpg. 1/4 lb.

