

Dimensional Data for Prince Cylinders on this page

| Bore | A | Crosstube Width | |
|--------|---------|-----------------|--------|
| | | L1 | L2 |
| 4" | 2 1/4" | 4 3/4" | 3 1/4" |
| 4 1/2" | 2 1/4" | 5 1/4" | 3 1/4" |
| 5" | 2 1/16" | 5 3/4" | 4" |
| 6" | 2 1/16" | 6 3/4" | 4" |
| 8" | 3" | 9" | 5" |



Prince Gladiator Heavy Duty Cylinders

- Brand new PRINCE "Gladiator" line. Welded, double acting cylinders with fully chromed piston rod. 3000 PSI working pressure.

5" BORE

SPECIFICATIONS: Ports SAE 12, 1 1/2" dia. pins.

| ITEM | Stroke | Rod Dia. | Retracted Lgth. | Shpg. | Price |
|------------|--------|----------|-----------------|----------|-----------|
| 9-12865-08 | 8" | 2 1/2" | 19" | 80 lbs. | \$ 641.95 |
| 9-12865-12 | 12" | 2 1/2" | 23" | 89 lbs. | \$ 696.60 |
| 9-12865-16 | 16" | 2 1/2" | 27" | 100 lbs. | \$ 762.10 |
| 9-12865-20 | 20" | 2 1/2" | 31" | 112 lbs. | \$ 815.40 |
| 9-12865-24 | 24" | 2 1/2" | 35" | 120 lbs. | \$ 874.15 |
| 9-12865-30 | 30" | 2 1/2" | 41" | 135 lbs. | \$ 957.15 |
| 9-12865-36 | 36" | 2 1/2" | 47" | 196 lbs. | \$1022.65 |
| 9-12865-48 | 48" | 2 1/2" | 61" | 234 lbs. | \$1267.65 |
| 9-12865-54 | 54" | 2 1/2" | 68" | 251 lbs. | \$1288.50 |
| 9-12865-60 | 60" | 2 1/2" | 75" | 270 lbs. | \$1439.10 |


6" BORE

SPECIFICATIONS: Ports SAE 12, 1 1/2" dia. pins.

| ITEM | Stroke | Rod Dia. | Retracted Lgth. | Shpg. | Price |
|------------|--------|----------|-----------------|----------|-----------|
| 9-12866-08 | 8" | 3" | 19" | 112 lbs. | \$ 839.70 |
| 9-12866-12 | 12" | 3" | 23" | 121 lbs. | \$ 916.65 |
| 9-12866-16 | 16" | 3" | 27" | 133 lbs. | \$ 947.05 |
| 9-12866-24 | 24" | 3" | 35" | 205 lbs. | \$1097.55 |
| 9-12866-30 | 30" | 3" | 41" | 225 lbs. | \$1215.00 |
| 9-12866-36 | 36" | 3" | 47" | 245 lbs. | \$1331.80 |
| 9-12866-48 | 48" | 3" | 61" | 292 lbs. | \$1595.15 |
| 9-12866-54 | 54" | 3" | 68" | 319 lbs. | \$1610.55 |
| 9-12866-60 | 60" | 3" | 75" | 346 lbs. | \$1653.40 |

8" Bore Prince Standard Duty Welded Cylinders

- Brand new PRINCE 3000 PSI standard duty double acting cylinders. Features include welded construction, fully chromed piston rod, ductile iron piston and thread-in gland and crosstube ends on both ends with grease zerks.

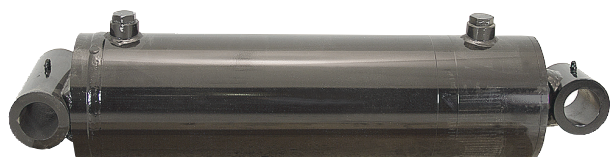

Prince Fortress Heavy Duty Welded Cylinders

- Brand new PRINCE "Fortress" double acting cylinders use internal threaded gland, U-cup seals for heavy duty applications. Max. 3000 PSI. Ports SAE 10. Crosstube ends for 1 1/4" pins.

4" BORE

SPECIFICATIONS: Ports SAE 10, 1 1/4" dia. pins.

| ITEM | Stroke | Rod Dia. | Retracted Lgth. | Shpg. | Price |
|-----------|--------|----------|-----------------|----------|----------|
| 9-5115-08 | 8" | 2" | 17" | 45 lbs. | \$473.85 |
| 9-5115-12 | 12" | 2" | 21" | 53 lbs. | \$502.50 |
| 9-5115-16 | 16" | 2" | 25" | 60 lbs. | \$517.50 |
| 9-5115-20 | 20" | 2" | 29" | 67 lbs. | \$543.00 |
| 9-5115-24 | 24" | 2" | 33" | 75 lbs. | \$559.50 |
| 9-5115-30 | 30" | 2" | 39" | 84 lbs. | \$600.00 |
| 9-5115-32 | 32" | 2" | 41" | 89 lbs. | \$612.00 |
| 9-5115-36 | 36" | 2" | 45" | 96 lbs. | \$636.00 |
| 9-5115-40 | 40" | 2" | 49" | 105 lbs. | \$652.50 |
| 9-5115-42 | 42" | 2" | 51" | 109 lbs. | \$666.00 |
| 9-5115-48 | 48" | 2" | 59" | 122 lbs. | \$726.00 |
| 9-5115-60 | 60" | 2" | 73" | 146 lbs. | \$855.00 |

4 1/2" BORE

SPECIFICATIONS: Ports SAE 10, 1 1/4" dia. pins.

| ITEM | Stroke | Rod Dia. | Retracted Lgth. | Shpg. | Price |
|-----------|--------|----------|-----------------|----------|-----------|
| 9-5113-08 | 8" | 2 1/4" | 17" | 55 lbs. | \$628.45 |
| 9-5113-12 | 12" | 2 1/4" | 21" | 64 lbs. | \$637.20 |
| 9-5113-16 | 16" | 2 1/4" | 25" | 74 lbs. | \$690.55 |
| 9-5113-20 | 20" | 2 1/4" | 29" | 83 lbs. | \$681.00 |
| 9-5113-24 | 24" | 2 1/4" | 33" | 93 lbs. | \$708.00 |
| 9-5113-30 | 30" | 2 1/4" | 39" | 106 lbs. | \$763.50 |
| 9-5113-32 | 32" | 2 1/4" | 41" | 110 lbs. | \$760.50 |
| 9-5113-36 | 36" | 2 1/4" | 45" | 121 lbs. | \$849.85 |
| 9-5113-40 | 40" | 2 1/4" | 49" | 128 lbs. | \$831.00 |
| 9-5113-42 | 42" | 2 1/4" | 51" | 136 lbs. | \$844.50 |
| 9-5113-48 | 48" | 2 1/4" | 59" | 197 lbs. | \$942.00 |
| 9-5113-60 | 60" | 2 1/4" | 73" | 228 lbs. | \$1033.50 |

8" BORE

SPECIFICATIONS: Ports SAE 16, 2 1/2" dia. pins.

| ITEM | Stroke | Rod Dia. | Retracted Lgth. | Shpg. | Price |
|-----------|--------|----------|-----------------|----------|-----------|
| 9-8423-8 | 8" | 4" | 24" | 250 lbs. | \$2389.80 |
| 9-8423-12 | 12" | 4" | 28" | 275 lbs. | \$2185.00 |
| 9-8423-16 | 16" | 4" | 32" | 300 lbs. | \$2321.35 |
| 9-8423-20 | 20" | 4" | 36" | 325 lbs. | \$2465.80 |
| 9-8423-24 | 24" | 4" | 40" | 350 lbs. | \$2886.80 |
| 9-8423-30 | 30" | 4" | 46" | 385 lbs. | \$3367.00 |
| 9-8423-36 | 36" | 4" | 52" | 425 lbs. | \$2820.15 |
| 9-8423-48 | 48" | 4" | 66" | 500 lbs. | \$3719.80 |
| 9-8423-54 | 54" | 4" | 73" | 540 lbs. | \$3935.40 |
| 9-8423-60 | 60" | 4" | 80" | 580 lbs. | \$4776.80 |